

Print Mark Reader


WM03NCT2

Part Number



- Compact housing
- Small light spot
- Teach-in, external teach-in
- White light for recognition of any print mark combinations

These sensors have been specially designed to recognize print marks. They have a very small spot and use a white light LED with long service life. Only one sensor is required for the recognition of all color combinations, as well as the difference in brightness between print marks and the background.

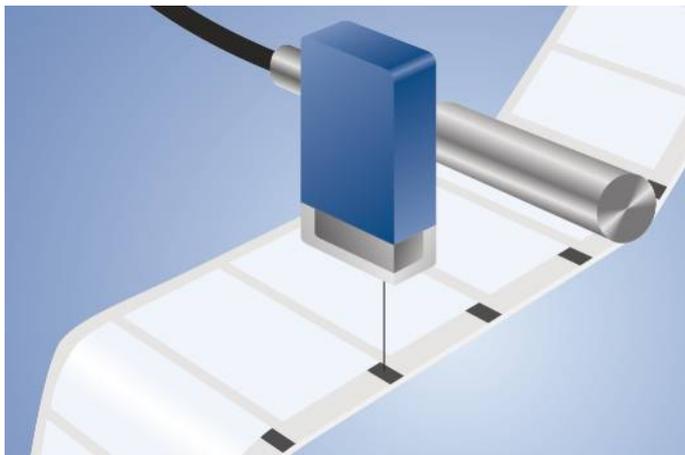

Technical Data

Optical Data	
Working Range	12...18 mm
Working Distance	15 mm
Resolution	20 Gray Scale
Switching Hysteresis	< 2 %
Light Source	White Light
Wave Length	400...700 nm
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Spot Diameter	1,5 × 2,5 mm


Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 30 mA
Switching Frequency	5 kHz
Response Time	100 μs
Off-Delay	20 ms
Off-Delay (RS-232)	0...2 s
Temperature Drift	< 2 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
NPN Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Lockable	yes
Teach Mode	ZT, FT
Protection Class	III

Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin


Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2164,07 a
NPN NO/NC switchable	●
RS-232 with Adapterbox	●
Connection Diagram No.	352
Control Panel No.	M7
Suitable Connection Technology No.	2
Suitable Mounting Technology No.	360

Complementary Products


Adapterbox A232	
Protection Housing Set ZSM-NN-02	
Protection Housing ZSV-0x-01	
wTeach2 software DNNF005	

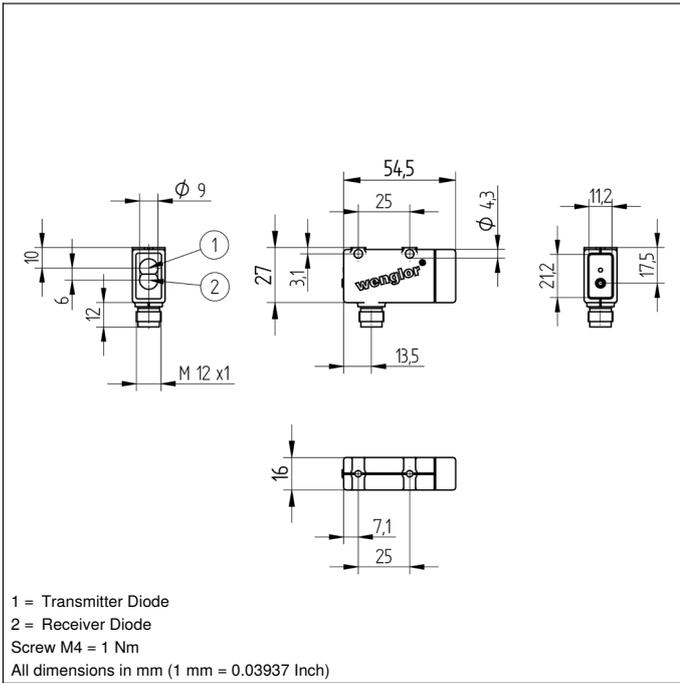

Ctrl. Panel

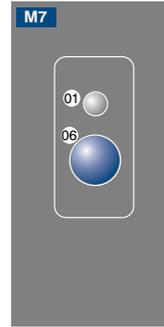

01 = Switching Status Indicator
 06 = Teach Button

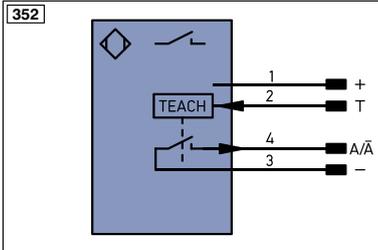


Legend

+	Supply Voltage +	PT	Platinum measuring resistor	ENa	Encoder A
-	Supply Voltage 0 V	nc	not connected	ENb	Encoder B
~	Supply Voltage (AC Voltage)	U	Test Input	AMIN	Digital output MIN
A	Switching Output (NO)	U	Test Input inverted	AMAX	Digital output MAX
Ā	Switching Output (NC)	W	Trigger Input	AOK	Digital output OK
V	Contamination/Error Output (NO)	O	Analog Output	SY In	Synchronization In
ṽ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY OUT	Synchronization OUT
E	Input (analog or digital)	BZ	Block Discharge	LI	Brightness output
T	Teach Input	AW	Valve Output	M	Maintenance
Z	Time Delay (activation)	a	Valve Control Output +		
S	Shielding	b	Valve Control Output 0 V		
RxD	Interface Receive Path	SY	Synchronization		
TxD	Interface Send Path	E+	Receiver-Line		
RDY	Ready	S+	Emitter-Line		
GND	Ground	≡	Grounding		
CL	Clock	SnR	Switching Distance Reduction		
E/A	Output/Input programmable	Rx+/-	Ethernet Receive Path		
IO-Link	IO-Link	Tx+/-	Ethernet Send Path		
PoE	Power over Ethernet	Bus	Interfaces-Bus A(+)/B(-)		
IN	Safety Input	La	Emitted Light disengageable		
OSSD	Safety Output	Mag	Magnet activation		
Signal	Signal Output	RES	Input confirmation		
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	EDM	Contactur Monitoring		
EN0_542	Encoder 0-pulse 0-0 (TTL)	ENa_542	Encoder A/Ā (TTL)		
		ENb_542	Encoder B/B̄ (TTL)		

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Ideal Working Distance

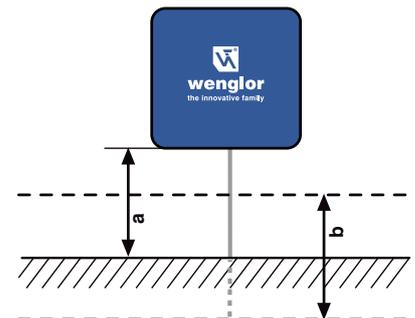

a = Working Distance
 b = Working Range

