


PO		TN	
----	--	----	--

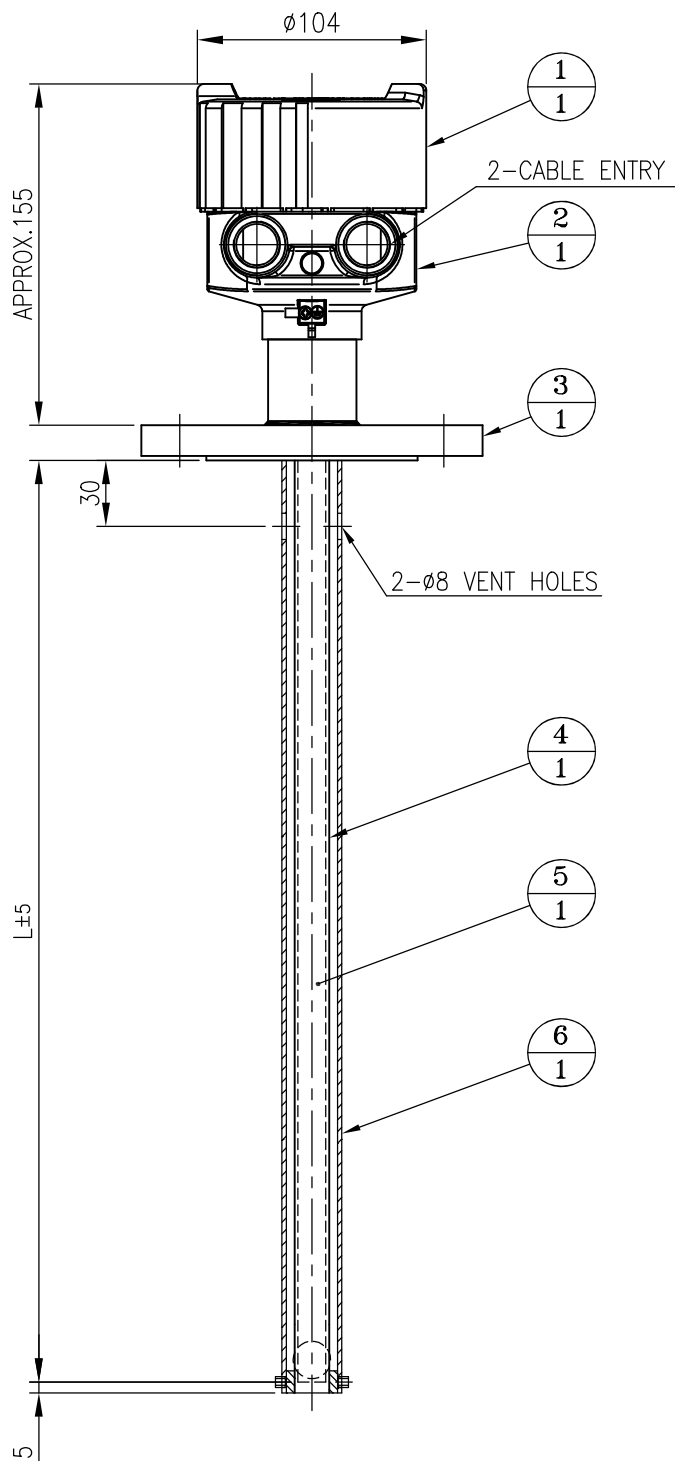


FOR	COMPACT TYPE LEVEL TRANSMITTER (Rod Probe w/ Ground Tube)
MOUNTING	TOP, FLANGE
ENCLOSURE	WEATHER PROOF (IP66)
AMBIENT TEMP.	-20 ~ +60 °C
MAX. PRESSURE	10 kgf/cm ²
MAX. TEMP.	80 °C

CABLE ENTRY	PF 1/2"(F) ☐
-------------	--

ELECTRICAL SPEC.	POWER SUPPLY : DC 24V OUTPUT SIGNAL : DC 4~20mA
------------------	--

NO.	DESCRIPTION	MATERIAL	REMARKS
1	COVER	AL.C	
2	BASE	AL.C	
3	PROCESS CONN.	☒ 304 SS ☐ 316L SS	
4	INSULATION	TEFLON	t 1
5	SENSING ROD	316L SS	12.7
6	GROUND TUBE	316L SS	27.2

PROCESS CONN. SIZE
☐ 50A JIS 10K BLRF
☐ ANSI 2"150# BLRF
☐ 50A JIS 20K BLRF
☐ ANSI 2"300# BLRF
☒ 50A JIS 10K FF

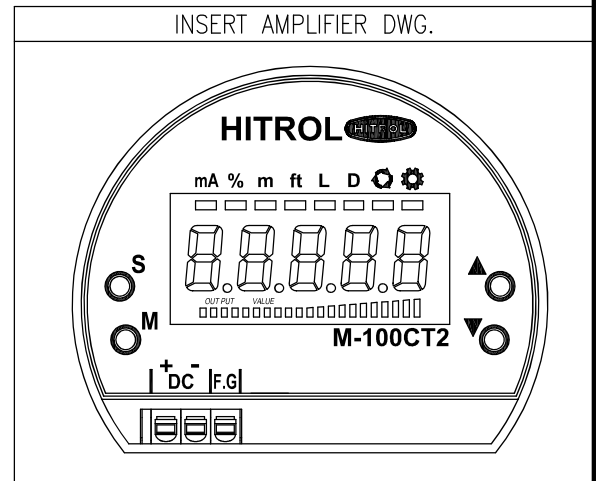

TAG NO.	Q'TY	L
	3	950

NOTE
1. GENERAL TOLERANCE IS ±3mm EXCEPT AS NOTED.

						HITROL HITROL CO., LTD.	SCALE	UNIT	SHEET NO.
							N.S	mm	
						TITLE	PROJECT		
						CAPACITANCE TYPE LEVEL TRANSMITTER HT-100CT-2	DRAWING NO.		
	2022.01.05	1ST ISSUE	H J KIM	B S SUNG			HT100CT2-CBB-01		
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY				

A4(210mm x 297mm)

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party use without our written permission.