



## + Features and Benefits

### TRUE ZERO AIR LOSS:

Exclusive operating principle guarantees maximum energy savings

### HIGHEST RELIABILITY:

Integrated sieve keeps the drain operational and unaffected by dirt, and eliminates the need for a Y-strainer and extra maintenance

### LOWEST MAINTENANCE:

Reduce overall time and costs




### SENSOR CONTROLLED:

Ensures intelligent operation at all times and is safe for all condensate types

### INTEGRATED ALARM:

Visual status indication is given on the drain and can be wired for remote access

## + Operating Principle

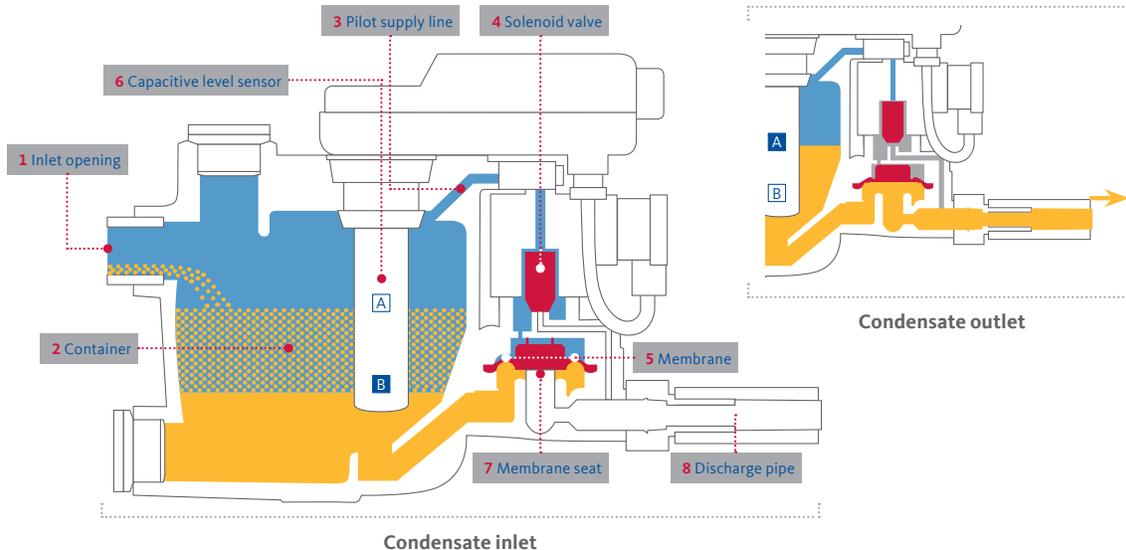


The condensate trickles through the inlet opening (1) and collects in the container (2). Initially, the valve is closed as, via the pilot supply line (3) and the solenoid valve (4), pressure differential above the membrane (5) is effected. The larger surface area above the membrane results in a high closing force. The membrane seat remains closed and leak-proof. When the container is filled with condensate, so that the capacitive level sensor (6) gets a signal at the maximum point **A**, the solenoid valve switches over and the area above the membrane is vented. As a result of the decreasing pressure above the membrane, the membrane lifts off the membrane seat (7) and the overpressure in the housing forces the condensate into the discharge pipe (8).

## BEKOMAT® PN and E Series Condensate Drains


for high pressure systems

Standard Voltage	115 Vac
Ambient Temperature	+33 / +140°F
Diaphragm Material	Viton®
Housing Protection	NEMA 4




Depth: 2.6

Aluminum housing  
+ hard coating & high pressure



Depth: 3.7


Aluminum housing  
+ hard coating & high pressure

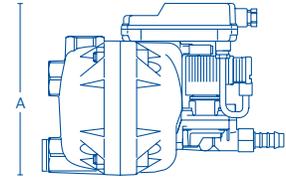

Depth: 4.7


Aluminum housing  
+ hard coating & high pressure

BEKOMAT®	12 CO PN 63	13 CO PN 50	14 CO PN 25
Connection (NPT)	1 x ½"	2 x ½"	3 x ¾"
Min. / Max. Pressure (psig)	12 / 912	12 / 725	12 / 360
Flow Rate (scfm)	280	1,300	5,400
Dryer Flow Rate (scfm)	560	2,600	10,800
Filter Flow Rate (scfm)	2,800	13,000	54,000
Dimension data			
A (in inches)	5.8	6.4	7.1
B (in inches)	6.2	8.3	9.9
Weight	2.0	4.4	6.4



Depth: 6.3

Stainless Steel housing  
+ high pressure



Depth: 10.2

Stainless Steel housing  
+ high pressure

Stainless Steel housing  
+ high pressure

BEKOMAT®	3 E 25	3 E 63	6 E 25
Connection (NPT)	3 x ¾"	3 x ¾"	2 x ¾" / 1 x 1"
Min. / Max. Pressure (psig)	12 / 360	12 / 912	12 / 360
Flow Rate (scfm)	4,500	4,500	50,000
Dryer Flow Rate (scfm)	9,000	9,000	100,000
Filter Flow Rate (scfm)	45,000	45,000	500,000
Dimension data			
A (in inches)	9.5	9.5	10.8
B (in inches)	10.1	10.1	12.2
Weight	7.5	7.5	14.8