

VOLTAGE & PHASE RELAY


PVR/PR
series

| | | |
|---------------------|---|---|
| Product | Phase & Voltage Relay | Phase Relay |
| Model | PVR - 3 - □ □ □ V | PR - 1 - □ □ □ V |
| Figure |  |  |
| Power Supply | 230V or 380V or 440VAC or 480VAC, | 50/60Hz |
| High Voltage Limit | ±20% | |
| Low Voltage Limit | ±20% | |
| ON Delay Time | 1.0~10.0 Sec Adjustable | |
| Reset Delay Time | 1.0~10.0 Sec Adjustable | 2 Sec < Fixed > |
| Output Method | Relay | |
| Contact Rated | 5A/250VAC | |
| Output Status | Normal ON < RUN > | |
| Dielectric Strength | 2.5KV / 1 min | |
| Insulation Strength | 100MΩ / 500 VDC. | |
| Life of Relay | 20 X 10 ⁶ Times | |
| Circumstance | -20°~+60°C ; 35~85% RH | |
| Weight | 155g | 140g |

Operating Status (PVR-3)

| Status LED | Norm. | High Voltage | Low Voltage | R/T Loss | S Loss | Phase Rev |
|---------------|-------|-----------------|----------------|-------------|-----------|--------------|
| Run | ○ | × | × | × | × | × |
| Over | × | ○ | × | × | × | × |
| Under | × | × | ○ | × | ○ | ○ |

Connection Diagram

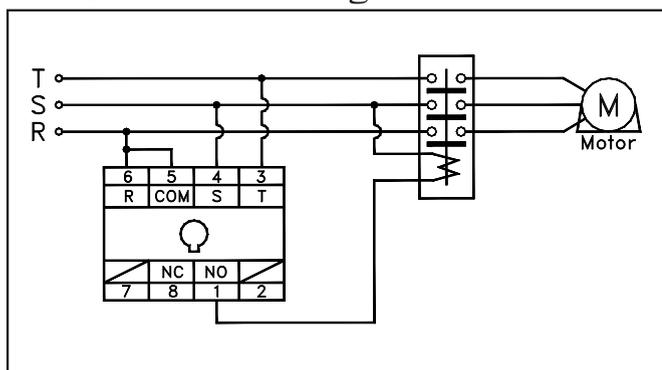

Dimension

