

SERIES 626 & 628 | INDUSTRIAL PRESSURE TRANSMITTER/TRANSDUCER

FEATURES/BENEFITS

- NEMA 4X rated enclosure provides protection in harsh environments permitting outdoor monitoring or in areas where dust and particulate matter exists
- Robust 316L SS oil filled sensor provides shock and vibration resistance insuring stability in controlling pressure for process applications
- A wide array of ranges, process connections, and electrical terminations that can meet pressure measurement specifications from low to very high.

APPLICATIONS

- Compressors
- Pumping systems
- Irrigation equipment
- Hydraulic
- Industrial process monitoring

DESCRIPTION

The **SERIES 626** Pressure Transmitters possess a highly precise 0.25% full scale accuracy piezo-resistive sensor contained in a compact, rugged, NEMA 4X (IP66) stainless steel general purpose housing or cast aluminum conduit housing.

The **SERIES 628** Pressure Transmitters are ideal for OEMs with 1% full scale accuracy sensors. The transmitter is also available in the general purpose housing and the cast aluminum conduit housing.


The corrosion resistant 316L stainless steel wetted parts allow the Series 626 and 628 transmitters to measure the pressure in a multitude of processes from hydraulic oils to chemicals. The Series 626 and 628 are available in absolute and pressure ranges with a variety of optional outputs, process connections, and electrical terminations to allow you to select the right transmitter for your application.




SPECIFICATIONS

Service	Compatible gases and liquids.
Wetted Materials	Type 316L SS.
Accuracy	626: 0.25% FS, 0.20% RSS; 628: 1.0% FS, 0.5% RSS; 626 Absolute Ranges: 0.5% FS, 0.30% RSS. (Includes linearity, hysteresis, and repeatability).
Temperature Limits	0 to 200 °F (-18 to 93 °C).
Compensated Temperature Range	0 to 175 °F (-18 to 79 °C).
Thermal Effect	±0.2% FS/°F (includes zero and span).
Pressure Limits	See table on catalog page.
Display	Optional 4-1/2 digit LCD field attachable display.
Power Requirements	10 to 30 VDC (for 4 to 20 mA, 0 to 5, 1 to 5, VDC outputs); 13 to 30 VDC (for 0 to 10 VDC output); 5 VDC ±0.5 VDC (for 0.5 to 4.5 VDC ratiometric output).
Output Signal	4 to 20 mA, 0 to 5 VDC, 1 to 5 VDC, 0 to 10 VDC, or 0.5 to 4.5 VDC.
Response Time	300 ms.
Loop Resistance	0 to 1000 Ohms max. R max = 50 (Vps-10) Ohms (4 to 20 mA output), 5K Ohms (0 to 5, 1 to 5, 0 to 10, 0.5 to 4.5 VDC output).
Stability	1.0% FS/year (typ).
Current Consumption	38 mA maximum (for 4 to 20 mA output); 10 mA maximum (for 0 to 5, 1 to 5, 0 to 10, 0.5 to 4.5 VDC output); 140 mA maximum (for all 626/628/629-CH with optional LED).
Electrical Connections	Conduit housing (-CH): Terminal block, 1/2" female NPT conduit; General purpose housing (-GH): Cable DIN EN 175801-803-C.
Process Connections	1/4" male or female NPT and BSPT.
Enclosure Rating	NEMA 4X (IP66).
Weight	10 oz (283 g).
Agency Approvals	CE.



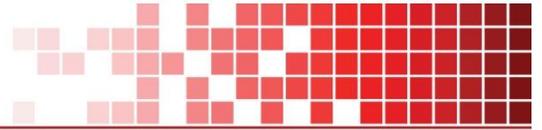

DIMENSIONS

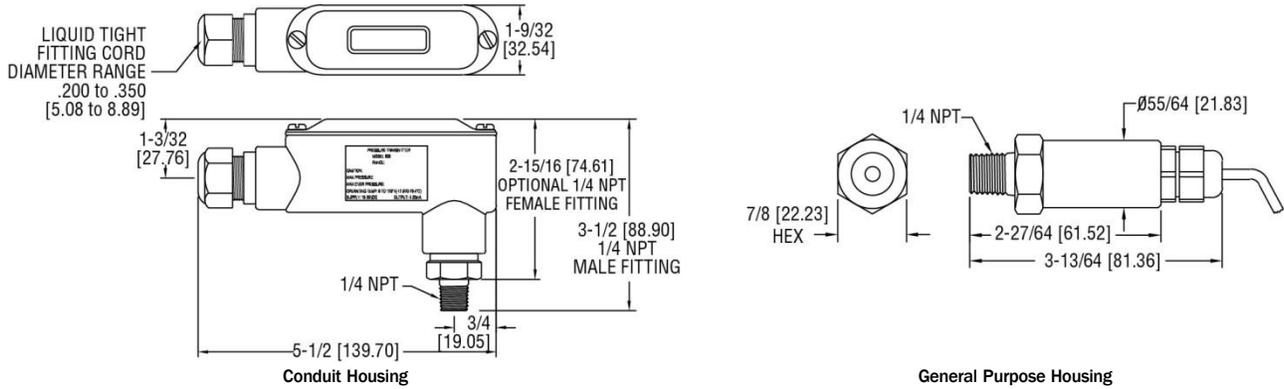

HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code

	626	-05	-CH	-P3	-E1	-S1	-NIST	
SERIES	626 - 0.25% full scale accuracy 628 - 1.0% full scale accuracy							
RANGE	-00 - 0 to 15 psia* -01 - 0 to 30 psia* -02 - 0 to 50 psia* -03 - 0 to 100 psia* -04 - 0 to 200 psia* -05 - 0 to 300 psia* -06 - 0 to 5 psi -07 - 0 to 15 psi -08 - 0 to 30 psi -09 - 0 to 50 psi -10 - 0 to 100 psi -11 - 0 to 150 psi -12 - 0 to 200 psi -13 - 0 to 300 psi -14 - 0 to 500 psi -22 - 0 to 600 psi -15 - 0 to 1000 psi -16 - 0 to 1500 psi -18 - 0 to 3000 psi -19 - 0 to 5000 psi -26 - 0 to 8000 psi -67 - 0 to 0.5 bar -71 - 0 to 2.5 bar -75 - 0 to 10 bar -81 - 0 to 40 bar							
								OPTIONS
								-AT - Aluminum tag -LED - Bright red LED display -NIST - NIST traceable calibration certificate
								SIGNAL OUTPUT
								-S1 - 4 to 20 mA -S2 - 1 to 5 VDC -S4 - 0 to 5 VDC -S5 - 0 to 10 VDC -S7 - 0.5 to 4.5 VDC
								ELECTRICAL CONNECTIONS
								-E1 - Cable gland with 3' of prewired cable -E3 - Cable gland with 9' of prewired cable -E4 - DIN EN 175801-803-C -E5 - 1/2" female NPT conduit -E6 - M-12 4-pin connector UL listed -E8 - Packard connector -E9 - M-12 4-pin connector non-UL listed
								PROCESS CONNECTIONS
								-P1 - 1/4" male NPT -P2 - 1/4" female NPT -P3 - 1/4" male BSPT -P5 - 1/4" female SAE w/ refrigerant valve depressor -P9 - 1/2" male NPT
								HOUSING
								-CH - Conduit housing -GH - General purpose housing

*Only available on -GH housing models

ACCESSORIES

Model	Description	Model	Description
A-164	16.4' (5 m) cable with M-12 4-pin female connector	A-961	9' (3 m) Packard cable
A-960	3' (1 m) Packard cable	A-962	20' (7 m) Packard cable

Important Notice: Dwyer Instruments, Inc. reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.

