

Sealing Data Sheet for Butterfly Valves (DN)


Material	-	EPDM (peroxide-cured)
Colour	-	black
Hardness	°Sh	75 ± 5
Adm. operating temperature	°C	min. ±0 max. +95 CIP +85 SIP -140 (max. 30 min)
Certification	-	FDA 21 CFR 177.2600 3A Sanitary Standard Class II USP Class VI GB 4806.01 - 2016

The sealing material complies with the requirements of the following European regulations:

- (EC) No. 1935/2004
- (EC) No. 2023/2006
- BfR-Recommendation XXI

The sealing material does not contain any substances originating from humans or animals (ADI free).
Suitability and chemical resistance of the sealing material shall be verified in each individual case.

Marking



KIESELMANN

4328 ### 000 - 054 Item code


E Material code (E = EPDM)

Tool code

/ # Year / Quarter

Manufacturer

Size table / Item code

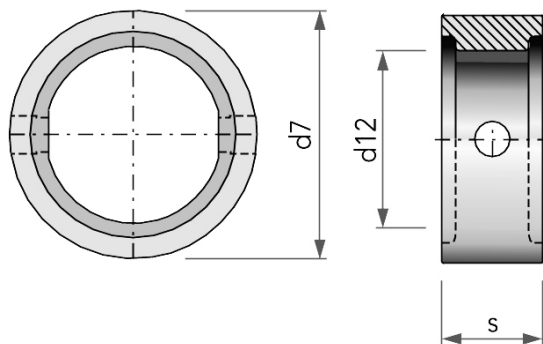

DN	Ød7	Ød12	s	Material code
10/15	28	16	21	4328 015 000 - 054
20	33	20	21	4328 020 000 - 054
25	43	25	26	4328 025 000 - 054
32	50	32	26	4328 032 000 - 054
40	57	39	27	4328 040 000 - 054
50	71	50	29	4328 050 000 - 054
65	87	65	29	4328 065 000 - 054
80	104	81	32	4328 080 000 - 054
100	124	100	35	4328 100 000 - 054
125	150	125	39	4328 125 000 - 054
150	177	150	41	4328 150 000 - 054
200	238	202	45	4328 200 000 - 054