


S10

Socket for Interface relay


Type	S10 1-pole, 1 connection level Logic wiring Integrated retaining clip and labelling space Coil bridge bar for A2, 11
Rated current	10 A
Specifications	Rated load 10 A / 250 V Insulation Test voltage V rms / 1 min 5 kV Contact terminals 2,5 kV Contact / Coil terminals 5 kV Cross-section of connecting wire – Single-wire 4 mm ² or 2 x 2,5 mm ² – Multi-wire 22 - 14 AWG Max. screw torque 1,2 Nm Screw dimensions M3, Pozi, slot Integrated retaining clip/plastic for relay series C10, CSS (CP-17B) Labelling space detachable Connection label 1...5; DIN/EN Mounting DIN rail TS35 or mounting plate Ambient temperature operation/storage -40 (no ice)...60 °C / -40 ... 80 °C Weight 23g

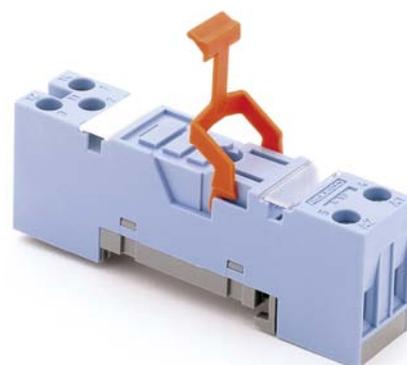



Socket for plug-in 10A IRC relays	C10-A, C10-T, CSS, C10-G
--	---------------------------------

Accessories	S10-BB CP-17B
Coil bridge bars	
Retaining clip, plastic	

Connection diagram

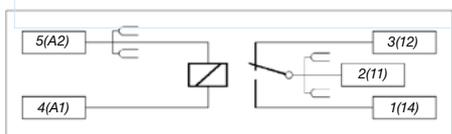

Dimensions [mm]

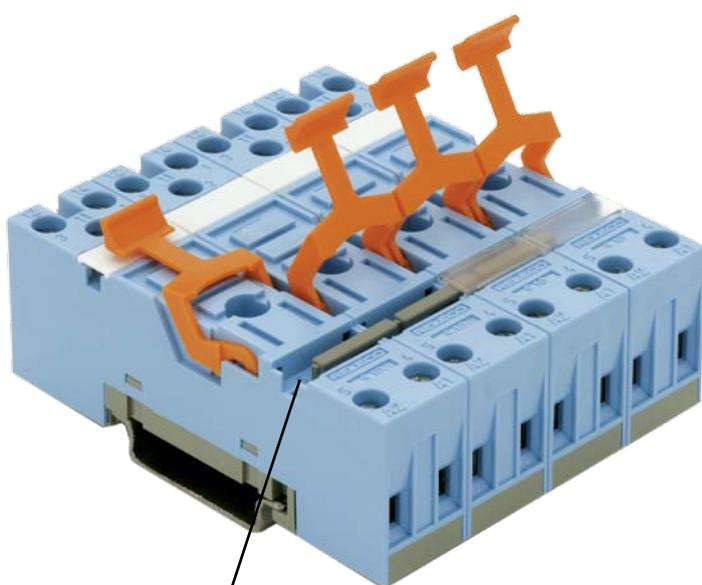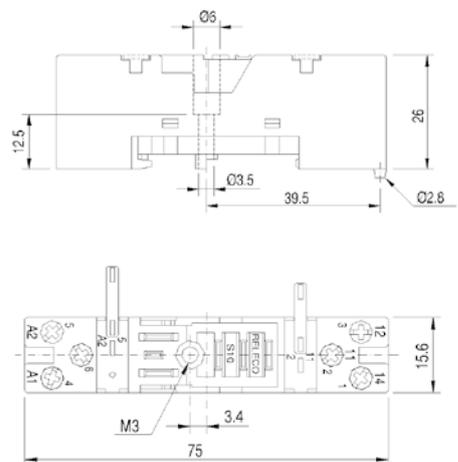

BRIDGE BAR