

# Switch guards

For switch series 3500 - 600H - 6000 - 13000



## DISTINCTIVE FEATURES

- Prevent accidental lever operation
- Holes for wiring a seal
- Many options available
- Models for 2 or 3 positions switches



## ENVIRONMENTAL SPECIFICATIONS

- Salt spray test : 96 hours (IEC 68-2-11)
- Operating temperature : -40 °C to +85 °C (-40 °F to +185 °F)



## MATERIALS

- Support plate : stainless steel
- Guard : stainless steel

APEM products may be recycled at end-of-life for the re-claiming of valuable metal components.



# Switch guards

For switch series 3500 - 600H - 6000 - 13000

## BUILD YOUR PART NUMBER




SERIES

BUSHING SHAPES

SWITCH GUARD SHAPES

<b>For standard products</b>		<b>For other products</b>		<b>1</b>	Locks in center position
<b>A</b>	Flatted, left side	<b>E</b>	Flatted, up	<b>2</b>	Prevents down position
<b>B</b>	Flatted, right side	<b>F</b>	Flatted, down	<b>3</b>	Prevents up position
<b>C</b>	Keyway, left	<b>G</b>	Keyway, up	<b>4</b>	Locks in down position
<b>D</b>	Keyway, right	<b>H</b>	Keyway, down	<b>5</b>	Locks in up position

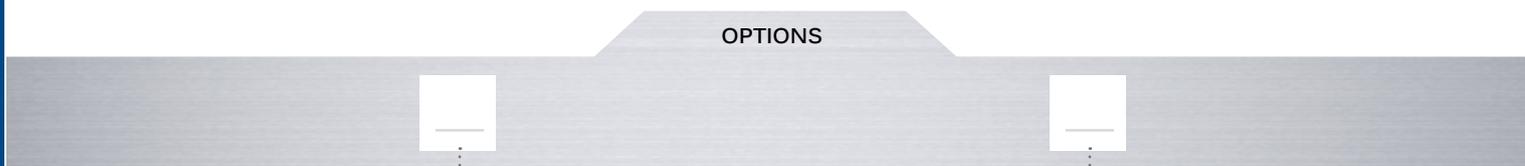

OPTIONS

SWITCH GUARDS COLORS

COLOR OF STRIPES

<b>1</b>	Blue	<b>A</b>	Red/ Black
<b>2</b>	Black	<b>B</b>	Yellow/ Black
<b>3</b>	Green	<b>C</b>	Red/ White
<b>4</b>	Grey	<b>D</b>	White/ Black
<b>5</b>	Yellow	See next pages for drawing.	
<b>6</b>	Red		
<b>7/1</b>	White		
<b>9</b>	Orange		
<b>0</b>	Striped (see right)		

## ABOUT THIS SERIES

On the following pages, you will find successively basic part numbers and options in the same order as in above chart.

 **Notice** : please note that not all combinations of above numbers are available. Refer to the following pages for further information.

# Switch guards

For switch series 3500 - 600H - 6000 - 13000

## SERIES 90 - WITH STANDARD OR FLATTED BUSHING

Lever locked in center position


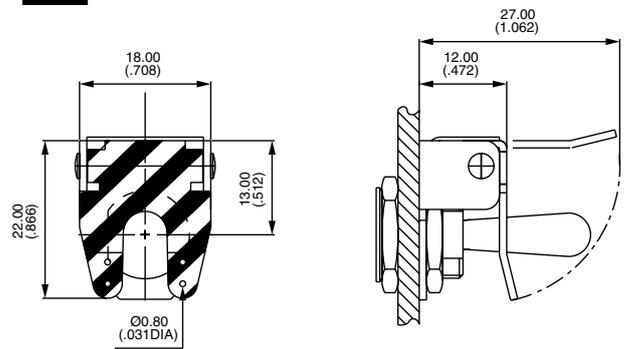


Plate features holes for wiring a seal.


### BUSHING SHAPES




### FOR STANDARD PRODUCTS




A



B




C




D


### FOR OTHER PRODUCTS




E



F



G




H


### SWITCH GUARD SHAPES




- 1 Locks in center position
- 2 Prevents down position
- 3 Prevents up position
- 4 Locks in down position
- 5 Locks in up position




1




2



3



4



5

# Switch guards

For switch series 3500 - 600H - 6000 - 13000

## SWITCH GUARD COLORS




- 1 Blue
- 2 Black
- 3 Green
- 4 Grey
- 5 Yellow
- 6 Red
- 7/1 White
- 9 Orange
- 0 Striped (see below)

## COLORS OF STRIPES



① Stripes / ② Stripes

- A Red / Black
- B Yellow / Black
- C Red / White
- D White / Black



## SERIES 90AX2328 FOR PUSHBUTTON SERIES 13000 WITH Ø 11.9 (15/32) BUSHING

- Spring-loaded cover returning automatically in lower position. The user has to keep the cover raised while actuating the switch.



Black with white stripe

**90AX2328-27**

Red with white stripe

**90AX2328-67**

