

SMT 6000 TS T3

Thru Beam

Photoelectric Sensors

Compatible Receivers:

SMR 6006 TS T3

SMR 6106 TS T3

SMR 6206 TS T3

SMR 6306 TS T3

SMR 6002 TS T3

SMR 6102 TS T3

SMR 6202 TS T3

SMR 6302 TS T3



Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 32 V dc
Control Feature	Adjustable range and test input
Connection	3 pin, M8 plug
Sensing Range	6 m
Light Source	Infrared (880 nm)
Housing Material	Stainless Steel
Housing	M12 x 1

Technical Data	
Supply Voltage	10 - 32 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	Max. 320 mW
Test Input	Yes
Control Input	Adjustable range
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 10°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316 / 1.4401)
Cable	3 x 0,14 mm ²
Cable Sleeve	PVC Ø 4,0 mm


Environmental Data

Vibration	10 - 55 Hz, 0.5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C
Storage Temperature	-40 to +80 °C
Sealing Class	IP 67

Approvals




Wiring Diagram

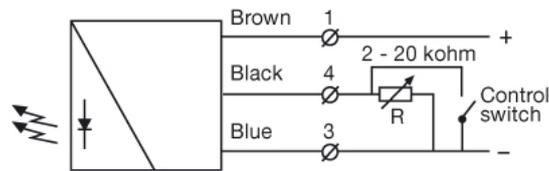


Connections


3 pin, M8

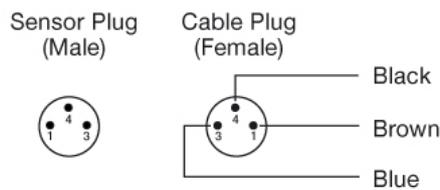


Parallel Displacement

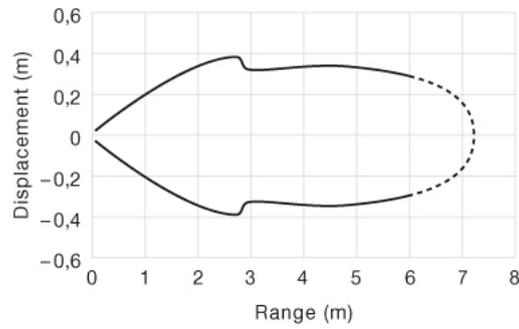

SMT 6000 and SMR 6x06



Angular Displacement

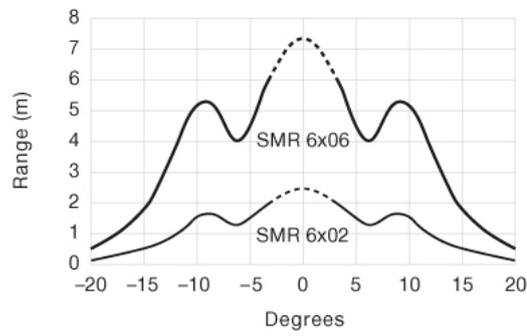

SMT 6000



Dimensions

