


STAND ALONE SENSORS

Stand alone contactless sensors with electromechanical technology

SSR Range

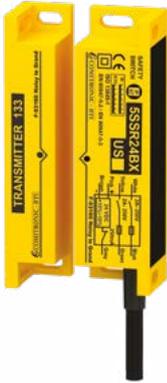

- Redundant safety contacts: 2A / 250V
- Dry contacts free of potential (relay outputs)
- Safety level without external controller: PLc, category 1 according to ISO13849-1
- **Safety level with external controller (AWAX model): up to PLe, category 4 according to ISO13849-1**
- Material: PA6 or SS316L with polish mirror finishing, laser engraving and traceability by mechanical punching available (depending on version)
- IP68 (PA6) or IP69K (Stainless steel)
- Electrical connection: 3, 6, 12 m cable or 50 cm cable with M12/8PIN connector depending on version (MKT)
- Integrated LED diagnostics and/or NC auxiliary line

*New: 5SSR24 P/S:

- 3x2A/250V contacts
- 2NO + 1NC : parallel NC contact (P version) or serial contact (S version)
- Safety level without external controller: PLc, category 1 according to ISO13849-1
- Compatible with a T-Splitter for a fast and quick automatic series connection



AMX Range



- Redundant safety contacts: 2A / 48V
- Dry contacts free of potential (relay outputs)
- Integrated auto-control
- 2 million mechanical actions 2A at full load guaranteed
- Safety level without external controller: PLc, category 3 according to ISO13849-1
- Safety level with external controller (AWAX model): up to PLe, category 4 according to ISO13849-1
- Material: PA6 or SS316L with polish mirror finishing, laser engraving and traceability by mechanical punching available depending on version
- IP68 (PA6) or IP69K (Stainless Steel)
- Electrical connection: 3, 6, 12 m cable or 50 cm cable with M12/8PIN connector depending on version (MKT)
- Integrated LED diagnostics and/or NC auxiliary line (on versions 3 and 5)

