

FOR	QUICK FLOAT LEVEL SWITCH
MOUNTING	TOP
ENCLOSURE	WEATHER PROOF (IP54)
MAX. PRESSURE	ATM kgf/cm ²
MAX. TEMP	150 °C



CABLE ENTRY	20A Hole
	<input type="checkbox"/>

NO.	DESCRIPTION	MATERIAL	REMARK
1	HOUSING	<input type="checkbox"/> C.S	
		<input checked="" type="checkbox"/> 304 SS	
2	PROCESS CONN.	<input checked="" type="checkbox"/> 304 SS	
		<input type="checkbox"/> 316L SS	
3	CABLE	SILICONE	
4	FLOAT	316L SS	
5	GUIDE WIRE	316L SS	
6	WEIGHT	304 SS	

PROCESS CONN. SIZE	
<input type="checkbox"/>	100A JIS 10K RF
<input checked="" type="checkbox"/>	100A JIS 10K FF

TAG NO.	QTY	L1	L2	L3	L4	L5	L6	L
	3	600	900	1100	1300	3200	3400	3800

SWITCH	
TYPE	MERCURY
RATING	AC 110V, 1A / DC 24V, 0.5A
FORM	6-SPDT

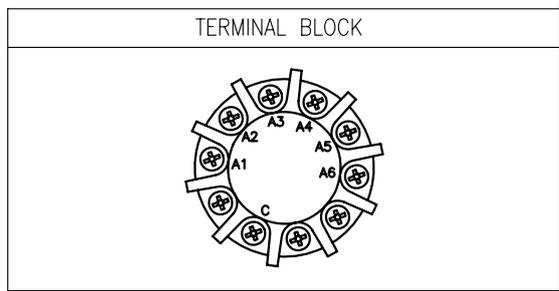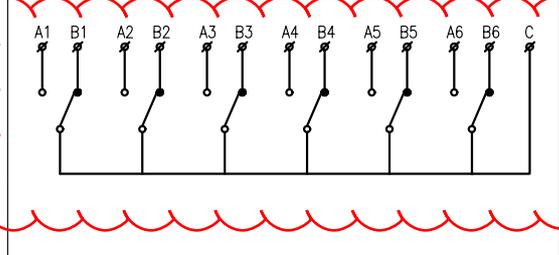

NOTE
1. GENERAL TOLERANCE ±5 EXCEPT AS NOTED.

△	.	.			
△	.	.			
△	.	.			
△	.	.			
△	JUN. 2018	1ST ISSUE	Y H LEE	B S SUNG	Y H KIM
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY

HITROL CO., LTD.	SCALE	N.S	UNIT	mm	SHEET NO.	1/1
	TITLE	QUICK FLOAT TYPE LEVEL SWITCH HQ-66S-6F				
	PROJECT					
	DRAWING NO.	HQ66S-E-02				

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party use without written permission.