


CONFIGURATION

X	Control	Standard Pilot
H	Minimum Pilot Pressure	300 psi (20 bar)
N	Seal Material	Buna-N
(none)	Material/Coating	

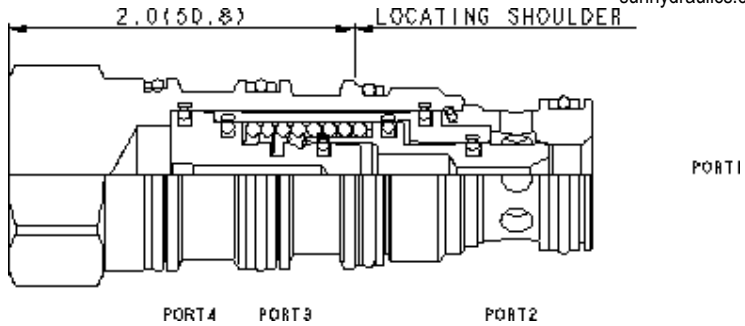

This is a normally closed, balanced poppet, switching element. Pilot pressure at port 3 shifts the valve to the open position.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Maximum Operating Pressure	5000 psi
Minimum Pilot Pressure Required to Shift Valve	300 psi
Maximum Valve Leakage at 110 SUS (24 cSt)	10 drops/min.@5000 psi
Pilot Volume Displacement	.02 in ³
Seal kit - Cartridge	Buna: 990022007
Seal kit - Cartridge	EPDM: 990022014
Seal kit - Cartridge	Polyurethane: 990022002
Seal kit - Cartridge	Viton: 990022006

CONFIGURATION OPTIONS

Model Code Example: DKFSXHN

CONTROL	(X)	MINIMUM PILOT PRESSURE	(H)	SEAL MATERIAL	(N)	MATERIAL/COATING
X Standard Pilot		H 300 psi (20 bar)		N Buna-N		Standard Material/Coating
				E EPDM		/AP Stainless Steel, Passivated
				V Viton		/LH Mild Steel, Zinc-Nickel