

PP 00 A 500

Power Supply Units

Standard, Power Supply Units



Product Data

Supply Voltage:	230 V ac
Housing:	11-pole DIN socket
Timer:	On/Off Delay
Output:	Relay
Supply Output Voltage:	15 V

Technical Data

Supply Voltage:	230 V ac
Current Consumption:	Max. 4 VA
Housing Material:	Noryl
Power On Indicator:	Green LED
Output Indicator:	Yellow LED
Voltage Tolerance:	+/- 15 %
Input Indicator:	Green LED
Supply Output Voltage:	15 V
Supply Output Current:	Max. 175 mA
Delay Time t_{on} / t_{off} :	0 – 10 sec, adjustable
Relay Output:	1 open/1 close 250 V ac/3A, 120 V ac/5A


Environmental Data

Operation Temperature:	- 10 to +50 °C
Storage Temperature:	- 40 to +80 °C
Sealing Class:	IP 40

Approvals



Wiring Diagram

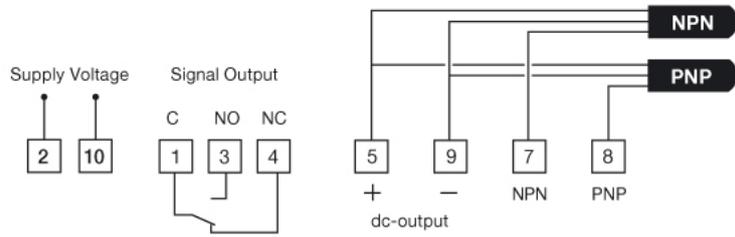

Dimensions

