
MALE END VIEW	FEMALE END VIEW
1 3	3 0 0 1
1 = BROWN	1 = BROWN
2 = WHITE	2 = WHITE
3 = BLUE	3 = BLUE
4 = BLACK	4 = BLACK
mini	mini
Tast.	iast.

SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	9.0 A					
RATED VOLTAGE [V]	600 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
NUMBER OF CONDUCTORS [AWG]	4x18 AWG					
CONDUCTOR INSULATION MATERIAL	PVC					
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K					

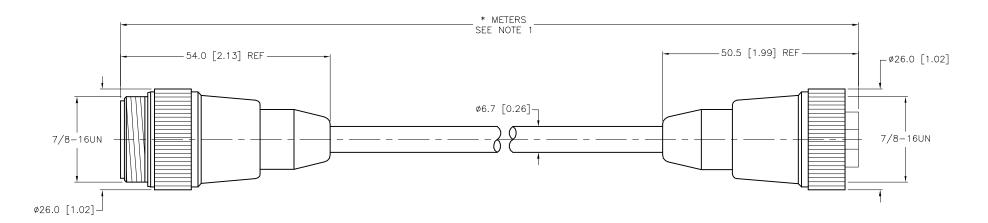

CABLE LENGTH	TOLERANCE*					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

## NOTES:

REV DESCRIPTION

D UPDATE PROTECTION CLASS

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

		O ORDER		RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		c <b>k</b>	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
< TO	TO (			MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS		DATE 03/06/06	DESCRIPTION RSM RKM		40-*M		
N TO SINDLIN		J.1.0 E.1.				APVD	SCALE 1=1.0					
				DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION	NO			REV	
			FINISH	CONTACT TURCK	MILLIMETE	ER [INCH]						
T	СВМ	04/13/21	76628	SEE SPECIFICATIONS	FOR MORE INFORMATION							$\cup$
Ī	BY	DATE	ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: 777001	669	Si	HEET 1	1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY