

**Cordset Part Number key**

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.



**7/8", 1" & 1 1/8" Minifast Cordset**

- R = straight
- W = right angle

**Gender**

- K = female connector, female threads
- S = male connector, male threads
- Y = male connector, female threads
- X = female connector, male threads

**Coupling Nut Material**

- (blank) = nylon
- M = nickel plated brass
- V = stainless steel (hex on 1", 1 1/8" and knurl on 7/8")
- VH = stainless steel (hex on 7/8")

**Insertion Point of Extension Cable and Second Prefix\***

\* Male connector listed first, female connector second  
 Example: **RSM RKM 40-2M**

**Varieties**

- (blank) = PVC jacket
- /S90 = TPU jacket
- /S90-SP = TPU coil cord
- /S101 = Flexlife-20, high flex cable
- /S529 = yellow TPU jacket, braided shield, PVC inner jacket
- /S600 = CPE, rubber jacket
- /S824 = yellow PLTC
- /S1077 = silicone tubing
- /S1587 = TPE, Weldlife
- /S.. = consult factory, special
- /CS.. = consult factory, special
- /S760 = black cable, black mold body
- /S771 = black cable, black mold body

**Length in Meters**

**Number of Wires / AWG / Color Codes**


- 20 = 2x18 AWG BN, BU
- 26 = 2x16 AWG WH, BK
- 28A = 2x18 AWG WH, BK
- 30 = 3x18 AWG GN/YE, BN, BU
- 31 = 3x18 AWG BK, BN, BU
- 35 = 3x16 AWG GN, RD/BK, RD/WH
- 36 = 3x16 AWG GN, BK, WH
- 38A = 3x18 AWG GN, BK, WH
- 311 = 3x18 AWG GN, RD/BK, RD/WH
- 40 = 4x18 AWG BN, WH, BU, BK
- 46 = 4x16 AWG BK, WH, RD, GN
- 47 = 4x16 AWG BN, WH, BU, GN/YE
- 48A = 4x18 AWG BK, WH, RD, GN
- 50 = 5x18 AWG BK, BU, GN/YE, BN, WH
- 55 = 5x16 AWG RD/WH, RD/BU, GN, RD/OG, RD/BK
- 56 = 5x16 AWG WH, RD, GN, OG, BK
- 58A = 5x18 AWG WH, RD, GN, OG, BK
- 511 = 5x18 AWG RD/WH, RD/BU, GN, RD/OG, RD/BK
- 61 = 6x18 AWG GN, WH, BU, GY, YE, BN
- 66 = 6x16 AWG WH, RD, GN, OG, BK, BU
- 68A = 6x18 AWG WH, RD, GN, OG, BK, BU
- 686 = 6x16 AWG OG, BU, BK, WH, RD, GN
- 76 = 7x16 AWG WH/BK, BK, WH, RD, OG, BU, GN
- 86 = 8x16 AWG OG, BU, WH/BK, BK, WH, RD, GN, RD/BK
- 96 = 9x16 AWG OG, BU, RD/BK, GN/BK, WH, RD, GN, WH/BK, BK
- 106 = 10x16 AWG OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, RD, GN, BK, WH
- 126 = 12x16 AWG OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, BU/BK, BK/WH, GN, RD, WH, BK

- \_\_A Metal Clad Cable (18 AWG straight only)
- \_\_D Smooth Plug Body (16 AWG straight only)


Cordset Part Number Key

Extension Examples:


Hybrid connector extensions also available. Consult factory.




R K M 40 - 2M - R S C 4.4T




R S M R K M 30 - 4M /S..

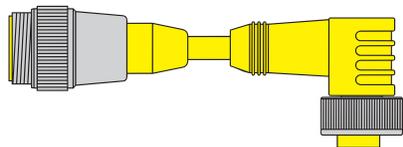

R S M W K M 30 - 4M /S..

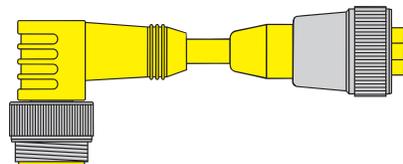

W S M R K M 30 - 4M /S..

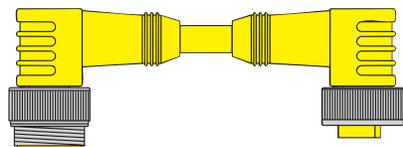

W S M W K M 30 - 4M /S..

minifast®