

Robertshaw®

RS6110
RS6220

VALUE SERIES
DIGITAL PROGRAMMABLE
THERMOSTATS



ELECTRIC GAS OIL HEAT PUMP MILLIVOLT

7 Day Programmable

RS6110 – 1 Heat / 1 Cool

RS6220 – Universal Control up to 2 Heat / 2 Cool

Seven Day Comfort Control Simplified

The Robertshaw® RS6000 thermostat family is *Simply the Right Choice™* when it comes to daily programmable temperature controls that can save energy and money.

With the comfort, convenience, and efficiency features that homeowners and contractors want, the RS6000 family provides high end features for an affordable price.

- Fully programmable with soft touch keys to easily set four events per day AND 7 day scheduling.
- Copy command that makes programming simple to set up and flexible to use.
- Pop-Up Wizard to customize thermostat settings with an instant start-up menu.

The RS6000 thermostats are fully compatible with all standard 24V AC heating and cooling systems. Additional compatibility with multi-stage gas/electric furnaces and heat pump systems are available in the RS6220.

Add in easy installation, Contractor ID option, and quality you can depend on, and you have the Robertshaw RS6000 thermostat family - *Simply the Right Choice.*

Features and Benefits

Universal Control up to 2 Heat / 2 Cool – RS6220 only

Operates on both multi-stage gas/electric furnaces and heat pumps means less inventory.

Auto Changeover

Switches automatically between heating and cooling for constant home comfort.

Pop-Up Wizard

Launches instant installation menu to quickly enter the settings for programmed thermostat functions.

Bigger Brighter Backlight with Nightlight Option

Makes viewing and setting the temperature easier any time of the day.

Worry-Free Memory Retention

Maintains set point and programmed parameters, even during power outages.

Easy Change Battery Access

Provides drop down removable compartment for quick battery replacement.

Circulating Fan

Maintains optimal air circulation between demand cycles for improved comfort with minimal energy use.

Adjustable Temperature Differential and Upstaging

Provides for full selection of parameters to deliver maximum comfort or energy savings.

High and Low Setpoint Limits

Protects the heating and cooling systems by limiting temperature settings.

California Title
24 Compliant

5 Year
Limited
Warranty






RS6110
RS6220

VALUE SERIES
DIGITAL PROGRAMMABLE
THERMOSTATS

Terminal Designations

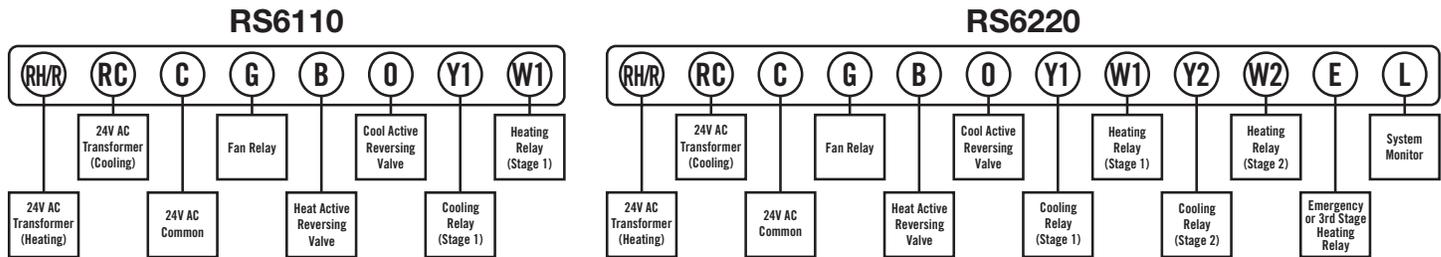

Technical Specifications

Product Weight	12.8 oz.
Electrical Rating	24V AC (18-30V AC) 1 amp maximum load per terminal 3 amp total maximum load (all terminals combined)
Temp. Control Range	45°F to 90°F (7°C to 32°C)
Accuracy	± 1°F (± 0.5°C)
Power	24V AC with battery back-up OR 3.0V DC (2 AA alkaline batteries included)
System Configurations	Two stage gas, electric, oil, millivolt, and up to three stage heat pump systems
Terminations	RS6110 – RH/R, RC, C, G, B, O, Y1, W1 RS6220 – RH/R, RC, C, G, B, O, Y1, W1, Y2, W2, E, L

Shipping Specifications

Individual Carton Dimensions	6.75" x 4.375" x 1.625"
Master Carton Quantity	6
Master Carton Dimensions	9.25" x 5.625" x 7.625"
Master Carton Weight	5 lbs.
Pallet Quantity	1170
Pallet Dimensions	40" x 48" x 48"

Replacement Chart

RS6110	
Robertshaw	9610
Braeburn®	5000
Honeywell	TH6110D
White-Rodgers	1F78-167, 1F80-0471, 1F80-241, 1F80-361, 1F87-361, 1F97-1271
RS6220	
Robertshaw	9615, 9620
Braeburn®	5200
Lux	PSPA722, TX9100E
Honeywell	TH6220D
White-Rodgers	1F85-0471, 1F85-277, 1F85-278

Verify specific application requirements before substitution.



Customer Service (Americas) +1.800.304.6563
Customer Service Facsimile +1.800.426.0804
HVACCustomerService@robertshaw.com

For Technical Service
Telephone +1.800.445.8299
TechnicalService@robertshaw.com

Robertshaw® is a trademark of Robertshaw, its subsidiaries
and/or affiliated companies. All other brands mentioned
may be the trademarks of their respective owners.

www.robertshaw.com
©2020 Robertshaw
02/20 – 150-2091 Rev D