


# coaxial valve

## type MK 10



**2/2 way valve** direct acting  
**pressure range** PN 0-40 bar  
**orifice** DN 10 mm  
**connection** thread  
**function** valve normally closed  
 symbol **NC**  
 valve normally open  
 symbol **NO**



**⚠** Above stated body materials refer to the valve port connections that get in contact with the media only!

**design** pressure balanced, with spring return  
**body materials** ① brass ②  
 ③ brass, nickel plated ⑤  
 ④ ⑥ stainless steel  
 ⑦ aluminium  
**valve seat** synthetic resin on metal  
**seal materials** NBR FPM, CR, EPDM

**details needed**

- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- nominal voltage

**general specifications**

**options**

<b>ports</b>	MK	threads G 1/4 - G 3/4	special threads
<b>function</b>		NC	NO
<b>pressure range</b>	bar	0-16 / 0-40	
<b>Kv value</b>	m <sup>3</sup> /h	2,5	
<b>vacuum</b>	leak rate		< 10 <sup>-6</sup> mbar•l•s <sup>-1</sup>
<b>pressure-vacuum</b>	P <sub>1</sub> ↔ P <sub>2</sub>		upon request
<b>back pressure</b>	P <sub>2</sub> > P <sub>1</sub>		available (max. 16 bar)
<b>media</b>		gaseous - liquid - contaminated	
<b>abrasive media</b>			
<b>damping</b>	opening		
	closing		
<b>flow direction</b>	A ↔ B	as marked	bi-directional (max. 16 bar)
<b>switching cycles</b>	1/min	200	
<b>switching time</b>	ms	opening 25 closing 25	
<b>media temperature</b>	°C	DC: -10 to +100 AC: -10 to +100	-30 to +120 -30 to +120
<b>ambient temperature</b>	°C	DC: -10 to +80 AC: -10 to +80	
<b>limit switches</b>			inductive
<b>manual override</b>			
<b>approvals</b>			LR/GL/WAZ
<b>mounting</b>			mounting brackets
<b>weight</b>	kg	MK 1,5	
<b>additional equipment</b>			upon request

**electrical specifications**

**options**

<b>nominal voltage</b>	U <sub>n</sub>	DC 24 V AC 230 V 40-60 Hz	special voltage upon request special voltage upon request
<b>actuation</b>	DC	direct-current magnet	
	AC	direct-current magnet with integrated rectifier	
<b>insulating rating</b>	H	180°C	
<b>protection</b>	IP65		
<b>energized duty rating</b>	ED	100%	
<b>connection</b>		plug acc. DIN EN 175301-803 form A, 4 positions x90° / wire diameter 6-8 mm	terminal box M16x1,5
<b>optional</b>	M12x1	connector acc. DESINA	connector acc. VDMA
<b>additional equipment</b>		illuminated plug with varistor	
<b>current consumption</b>	N-coil	DC 24 V 1,00 A AC 230 V 40-60 Hz 0,13 A	
	H-coil		DC 24 V 1,29 A AC 230 V 40-60 Hz 0,16 A
<b>explosion proof</b>			
<b>limit switches</b>		inductive (B)	normally open-PNP


**⚠** The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

**⚠** If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard  
 ■ specifications highlighted in grey are optional

type **MK 10**

function: **NC**  
closed when not energized

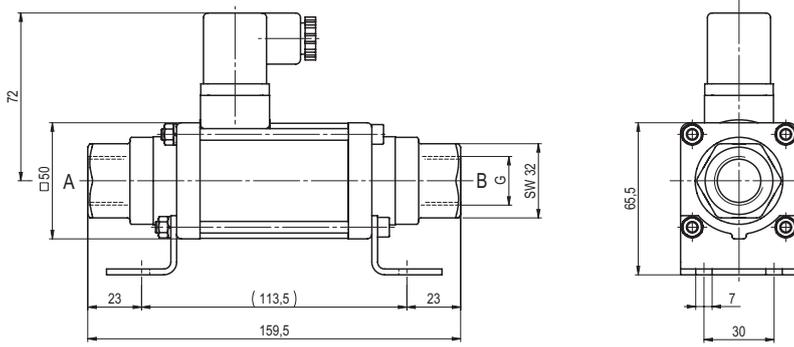

type **MK 10**

function: **NO**  
open when not energized

