


**PI2898**

PI-25BREA01-MFRKG/US/ /P

Pressure sensors

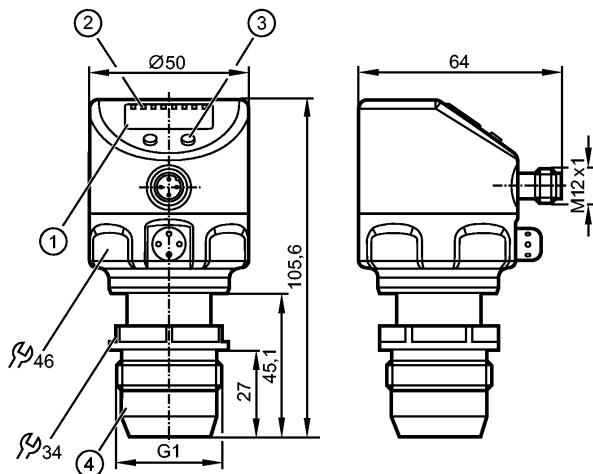

1: 4-digit alphanumeric display

2: status LEDs

3: Programming button

4: Sealing cone G1 male

Attention: The unit must only be installed in a process connection for G1 sealing cone! The G1 male sealing cone of the unit is only suited for adapters with metal end stop!

**ACS** **EC 1935/2004 EHEDG Certified**
**IO-Link****Product characteristics**

Combined pressure sensor

Connector

Function programmable

Sealing cone G1 male

Process connection: Sealing cone G1 male

2-wire connection technology:

analogue output

3-wire connection technology:

2 outputs

OUT1 = switching output

OUT2 = switching output or analogue output

4-digit alphanumeric display

Measuring range: -12.4...250.0 mbar / -5.0...100.4 inH<sub>2</sub>O**Application**

Application

Type of pressure: relative pressure  
 Hygienic systems, viscous media and liquids with suspended particles  
 Liquids and gases

Pressure rating

10000 mbar

4015 inH<sub>2</sub>O

Bursting pressure min.

30000 mbar

12044 inH<sub>2</sub>O

Medium temperature

[°C]

-25...125 (145 max. 1h)

**Electrical data**

Electrical design

2 wires DC / 3 wires DC PNP/NPN

Operating voltage

[V]

20...32 DC (2L) / 18...32 DC (3L)

Current consumption

[mA]

3.6...21 (2L) / &lt; 45 (3L)

Insulation resistance

[MΩ]

&gt; 100 (500 V DC)

Protection class

III

**PI2898**

PI-25BREA01-MFRKG/US/ /P

Pressure sensors

Reverse polarity protection		yes	
<b>Outputs</b>			
Output		2-wire connection technology: analogue output 3-wire connection technology: 2 outputs OUT1 = switching output OUT2 = switching output or analogue output	
Output function		1 x normally open / normally closed programmable + 1 x normally open / normally closed programmable or 1 x analogue (4...20 / 20...4 mA, scalable)	
Current rating	[mA]	250; (3L)	
Voltage drop	[V]	2; (3L)	
Short-circuit protection		pulsed	
Overload protection		yes	
Switching frequency	[Hz]	--- (2L) / 125 (3L)	
Analogue output		I: 4...20 mA (Ineg: 20...4 mA)	
Max. load	[Ω]	300 (2L) / max. (Ub - 10 V) x 50 (3L)	
<b>Measuring / setting range</b>			
Display unit		mbar, kPa, inH <sub>2</sub> O, mmWS, % der Spanne	
Measuring range		-12.4...250.0 mbar	-5.0...100.4 inH <sub>2</sub> O
Setting range			
Set point, SP		-12.0...250.0 mbar	-4.8...100.4 inH <sub>2</sub> O
Reset point, rP		-12.4...249.6 mbar	-5.0...100.2 inH <sub>2</sub> O
Analogue start point, ASP		-12.4...187.4 mbar	-5.0...75.2 inH <sub>2</sub> O
Analogue end point, AEP		50.0...250.0 mbar	20.1...100.4 inH <sub>2</sub> O
in steps of		0.2 mbar	0.1 inH <sub>2</sub> O
Factory setting		SP1 = 62.4 mbar; rP1 = 57.4 mbar SP2 = 187.4 mbar; rP2 = 182.4 mbar ASP = 0.0 mbar; AEP = 250.0 mbar	
<b>Accuracy / deviations</b>			
Accuracy / deviations (in % of the span) Turn down 1:1			
Switch point accuracy		< ± 0.2	
Characteristics deviation *)		< ± 0.2	
Linearity		< ± 0.15	
Hysteresis		< ± 0.15	
Repeatability **)		< ± 0.1	
Long-term stability ***)		< ± 0.1	
Temperature coefficients (TEMPCO) in the temperature range 0...70° C (in % of the span per 10 K)			
Greatest TEMPCO of the zero point		< ± 0.05	
Greatest TEMPCO of the span		< ± 0.15	
<b>Reaction times</b>			
Power-on delay time	[s]	1 (2L) / 0.5 (3L)	
Min. response time switching output	[ms]	--- (2L) / 3 (3L)	
Damping for the switching output (dAP)	[s]	0.00...30.00	
Damping for the analogue output (dAA)	[s]	0.01...99.99	

**PI2898**

PI-25BREA01-MFRKG/US/ /P


Pressure sensors

Step response time analogue output	[ms]	45 (2L) / 7 (3L)
Integrated watchdog		yes
<b>Interfaces</b>		
IO-Link device		
Transfer type		COM2 (38.4 kBaud)
IO-Link revision		1.0
IO-Link device ID		257 d / 00 01 01 h
Profiles		no profile
SIO mode		yes
Required master port class		A
Process data analogue		1
Process data binary		2
Min. process cycle time	[ms]	2.3
<b>Environment</b>		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection		IP 67 / IP 68 / IP 69K
<b>Tests / approvals</b>		
EMC		EN 61000-4-2 ESD: 4 kV CD / 8 kV AD EN 61000-4-3 HF radiated: 10 V/m EN 61000-4-4 Burst: 2 kV EN 61000-4-5 Surge: 0.5/1 kV EN 61000-4-6 HF conducted: 10 V
Shock resistance		DIN IEC 68-2-27: 50 g (11 ms)
Vibration resistance		DIN IEC 68-2-6: 20 g (10...2000 Hz)
MTTF	[Years]	148.85
<b>Mechanical data</b>		
Process connection		Sealing cone G1 male
Materials (wetted parts)		ceramics (99.9 % Al2 O3); PTFE; stainless steel 316L / 1.4435; surface characteristics: Ra < 0.4 / Rz 4
Housing materials		stainless steel 316L / 1.4404; FPM (Viton); PTFE; PBT (Pocan); PEI; PFA
Switching cycles min.		100 million
Weight	[kg]	0.34
<b>Displays / operating elements</b>		
Display		Display unit LED green Switching status LED yellow Function display 4-digit alphanumeric display Measured values 4-digit alphanumeric display
<b>Electrical connection</b>		
Connection		M12 connector; Gold-plated contacts
<b>Wiring</b>		

**PI2898**

PI-25BREA01-MFRKG/US/ /P

Pressure sensors

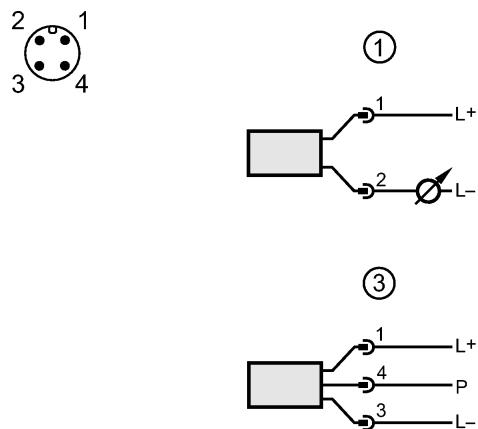

1 connection for 2-wire operation

2 connection for 3-wire operation

3 connection for IO-Link parameter setting (P = communication via IO-Link)

**Remarks**

## Remarks

Attention: The unit must only be installed in a process connection for G1 sealing cone! The G1 male sealing cone of the unit is only suited for adapters with metal end stop!

(2L) = value for 2-wire operation

(3L) = value for 3-wire operation

\*) linearity, incl. hysteresis and repeatability;

(limit value setting to DIN 16086)

\*\*) with temperature fluctuations &lt; 10 K

\*\*\*) in % of the span per year

## Pack quantity

[piece]

1