

Art. no. **2937**


Electronic oval gears **preset** flow meter for oil, series “**Oil Gate**”, with control gun, rubber protection guard, trigger guard, rigid outlet Ø 12 mm, automatic anti-drip nozzle and inlet swivel 1/2” BSP (M).

The preset function is adding a small, but effective element of automation which permits the user to predetermine the desired dispensing quantity and to stop the flow automatically once the preset quantity has been reached.

Re-calibration by the user is possible.

Art. no. **2942**

Electronic oval gears **preset** flow meter for antifreeze, series “**Oil Gate**”, with control gun, rubber protection guard, trigger guard, rigid outlet Ø 12 mm, automatic anti-drip nozzle and inlet swivel 1/2” BSP (M).

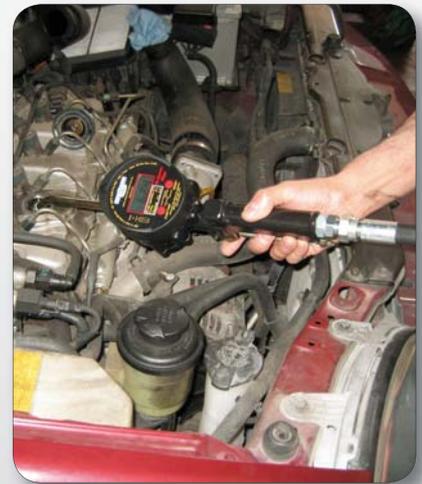

Art. no. **2836**

Electronic oval gears **preset** flow meter for oil, series “**Oil Gate**”, with control gun, rubber protection guard, trigger guard, flexible rubber outlet, Ø 1/2”, with curved rigid 90° stem, automatic anti-drip nozzle and inlet swivel 1/2” BSP (M).

Technical data	
Art. nos.	<b>2836 – 2937 – 2942</b>
Connections	1/2” BSP (F)
Flow range (l/min)	1 - 35
Operating temperature range	+ 10°C / + 50°C
Max working pressure	80 bar (1200 psi)
Accuracy	+/- 0.5%
Total max. resettable	9999 l
Total max. non- resettable	9999 l
Weight	1.6 kg

Not approved for legal transactions