


3/2 valves for manual actuators Ø 22 mm



3/2 valve supplied with screws for fixing the adaptator	Connection Ø4 Gas 1/8	89 543 501	89 543 101	—	—	—	—	—
Valve(s) 3/2 fixed on adaptator (supplied with adaptator not assembled)	Connection Ø4	89 543 701	89 543 201	—	—	—	—	—
Adaptator for 3/2 valve on actuators Ø 22		—	—	89 543 105	89 543 005	89 543 305	89 543 205	—
Version		NC	NO	NC	NO	NC + NO	NC + NC	24 679 702

Symbol




Characteristics

Operating pressure	bar	0 → 8	0 → 8	0 → 8	0 → 8	0 → 8	0 → 8	—
Orifice diameter	mm	2	2	2	2	2	2	—
Flow at 6 bars	NI/min	112	112	112	112	112	112	—
Control force	N	12.6	12.6	12.6	12.6	12.6	12.6	—
Operating temperature in dry air	°C	-5 → +60	-5 → +60	-5 → +60	-5 → +60	-5 → +60	-5 → +60	—
Life	operations	1.5 x 10 ⁶	1.5 x 10 ⁶	1.5 x 10 ⁶	1.5 x 10 ⁶	1.5 x 10 ⁶	1.5 x 10 ⁶	—
Non-connectable exhaust		•	•	•	•	•	•	—
Weight	g	50	50	60	60	110	110	40

Principle of operation


NC version




Dimensions

89 543 001 - 89 543 201

89 543 501 - 89 543 701




Ø 22 series




Holes drilled in panel for actuators Ø 22

EN 50007

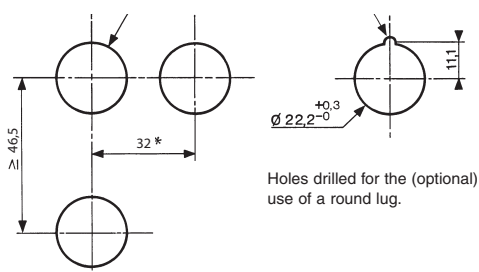

Holes drilled for the (optional) use of a round lug.

Installation

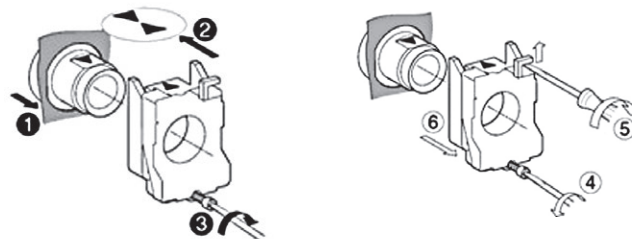

* > 40 Ø 40 push-buttons

* > 45 for lever type rotary switches