


# M18TIP8 Temperature sensor – Infrared sensor

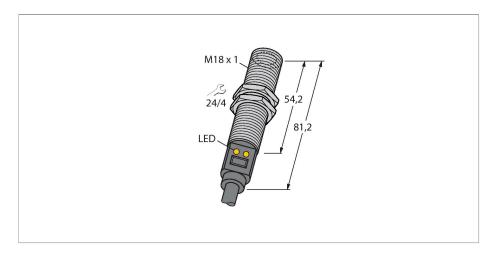


#### Technical data

Туре	M18TIP8
ID no.	3081125
Measuring range	0300 °C
Temperature operating range	-4158 °F
Factory setting	-20280 °C
	-4536 °F
Response time	75 ms
Operating voltage	1230 VDC
Short-circuit/reverse polarity protection	yes / Cyclic / yes
Protection type and class	IP67
Output 1	Analog output
Output 2	switching output
Output function	NO contact, PNP/Analog output
Current output	420 mA
Response time typical	< 75 ms
Ambient temperature	-20+70 °C
Storage temperature	-20+70 °C
Housing	
Housing material	Stainless steel, 1.4301 (AISI 304), Grey
Process connection	M18 × 1
Electrical connection	Cable
Cable quality	Ø 6 mm, Black, PVC, 2 m, 2 m
Core cross-section	5 x 0.5 mm <sup>2</sup>
Switching state	LED, Yellow
Included in delivery	2 M18 × 1 metal hexagon nuts

### **Features**


- ■Connection via cable, 2 m
- ■D:S ratio 8:1
- ■Operating voltage 12...30 VDC
- Measuring range adjustable via teach-in
- ■Analog output 4..20 mA
- ■PNP Alarm output switches at 20 mA
- ■Temperature range 0 ... +300 °C

### Wiring diagram



## Functional principle


Temperature sensors are used in applications where temperatures for control and optimisation of processes must be captured and monitored. The sensor operates only as a receiver. The thermal radiation of an object within a wave length range of 8 to 14 µm is transformed into an electrical signal via a thermopile and then further processed to become an output signal. Here the D:S (distance: spot) ratio is very important because it specifies the diameter of the spot at a defined distance. The sensor is optimally aligned, if the spot is completely covered by the object, whose temperature is to be monitored.



3052519

### Accessories

3033200 SMB18A Mounting bracket, rectangular, stainless steel, for sensors with 18



50,8 mm thread M18 x 1 ø5 36,

3052517

Mounting bracket, for wall mounting,

18 mm bore hole, srew set included

stainless steel 300, 2-piece, rotatable,

SMB18SF 25,4

Mounting bracket, PBT black, for sensors with 18 mm thread, rotatable

LAT1812 3074262

> Laser alignment aid, visible red, contains M12 laser emitter (laser class 2) and mounting bracket SMB1812, for sensors with 18 mm thread, 10 ... 30 VDC supply necessary