


# RI360P1-DSU35-ELIU5X2-H1151 Inductive Angle Sensor – With Analog Output Premium Line

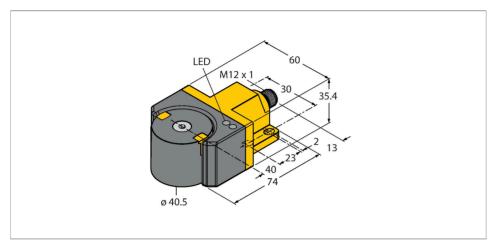


#### Technical data


Туре	RI360P1-DSU35-ELIU5X2-H1151
ID	1590866
Measuring principle	Inductive
General data	
Resolution	0.09°
Measuring range	0360 °
Nominal distance	1 mm
Mounting conditions	Non-flush
Repeat accuracy	≤ 0.025 % of full scale
Linearity deviation	≤ 1 % f.s.
Temperature drift	≤ ± 0.02 % / K
Output type	Absolute singleturn
Electrical data	
Operating voltage	1530 VDC
Residual ripple	≤ 10 % U <sub>ss</sub>
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes / yes (voltage supply)
Output function	5-pin, Analog output
Voltage output	010 V
Current output	420 mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance current output	≤ 0.4 kΩ

#### **Features**

- Rectangular, housing DSU35
- Plastic, PP-GF30-VO
- Detecting angular positions of 0° to 360°
- ■P1-Ri-DSU35 positioning element included in delivery
- Measuring range displayed via LED
- ■Programmable measuring range
- Immune to electromagnetic interference
- Resolution, 12-bit
- ■15...30 VDC
- ■0...10 V and 4...20 mA
- Male M12 x 1, 5-pin

#### Wiring diagram





#### Functional principle


Inductive measuring principle provides more safety

Based on the functional principle of RLC coupling, the sensor operates absolutely wear-free and is immune to magnetized metal splinters and other interference fields. Owing to the differential analysis, the output signal remains almost unchanged, even if the position of the positioning element deviates from the ideal axis of rotation.



# Technical data

Sample rate	500 Hz
Current consumption	< 50 mA
Mechanical data	
Design	Dual sensor for valve monitoring, DSU35
Dimensions	74 x 60 x 35.4 mm
Flange type	Flange without mounting element
Housing material	Plastic, PP-GF30
Housing material, positioning element	plastic, PA66 + PA6I/6T-GF40
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-25+75 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68 IP69K
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Measuring range display	multifunction LED, green
Included in delivery	Positioning element P1-Ri-DSU35, countersunk screw M6 × 25, 2 cylinder screws M5 × 12, 2 lock washers A5





2|4



### Mounting instructions

#### Mounting instructions/Description





Ri-DSU35 for mounting on rotary actuators The Ri-DSU35 angle sensor and the well-established Ni4-DSU35 inductive dual sensor are identical in construction. The user also profits from the enormous mounting flexibility of the device. The sensor can be mounted on all standard rotary actuators with a shaft diameter of max.14 mm thanks to an extensive range of available accessories. For larger shaft diameters use the BTS-DSU35-Z02 accessories.

LED function Operating voltage Green:Power on Measuring range

Green:Positioning element is in the measuring range

Green flashing:Positioning element is in the measuring range, signal low (e.g. distance too large)

LED OFF:Positioning element is outside the detection range



Individual (te	achina	with	positioning	element)
----------------	--------	------	-------------	----------

individual (teaching with positioning element)			
Bridge pin between	Gnd	Ub	LED
teach input Pin 5 (GY)	Pin 3 (BU)	Pin 1 (BN)	
2 s	start value	end value	status LED flashes then
			turns steady after 2 s
10 s	CCW rotation, then	CW rotation, then return to	after 10 s status LED
	return to last preset	last preset value	flashes fast for 2 s
	value		
15 s	-	default setting (360°, CW)	after 15 s power and
			status LED alternate
Preset – Mode (teaching without positioning element)			

reset - wode (teaching without positioning element)		
Bridge pin between	Gnd	
teach input Pin 5 (GY)	Pin 3 (BU)	

Bridge pin between	Gnd	Ub	LED
teach input Pin 5 (GY)	Pin 3 (BU)	Pin 1 (BN)	
2 s	activate preset mode	activate preset mode	status LED steady,
			flashes after 2 s
10 s	CCW rotation, then	CW rotation, then return to	after 10 s status LED
	return to last preset	last preset value	flashes fast for 2 s
	value		
15 s	-	default setting (360°, CW)	after 15 s power and
			status LED alternate
Angular range	Gnd	Ub	Status LED
	Pin 3 (BU)	Pin 1 (BN)	
30°	press once	-	1 x flashing
45°	press twice	-	2 x flashing
60°	press three times	-	3 x flashing
90°	-	press once	1 x flashing
180°	-	press twice	2 x flashing
270°	-	press three times	3 x flashing
360°	-	press four times	4 x flashing


#### Accessories

#### BTS-DSU35-Z01

#### 6900229

Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 65 mm; hole pattern on receptacle surface: 30 x 80 mm (30 x 130 mm); connection shaft (shaft extension) height: 20 mm/ Ø: max. 30 mm

#### BTS-DSU35-Z03



## 6900231

Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 110 mm; hole pattern on receptacle surface: 30 x 130 mm; connection shaft (shaft extension) height: 30 mm/Ø: max. 70 mm

#### P4-RI-DSU35



#### 100002204

Positioning element for angle sensors RI-DSU35

#### BTS-DSU35-Z02



#### 6900230

Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 65 mm; hole pattern on receptacle surface: 30 x 80 mm (30 x 130 mm); connection shaft (shaft extension) height: 20 mm (30 mm)/Ø: max. 40 mm


#### BTS-DSU35-Z07



#### 6900403

Mounting kit for dual sensors for larger rotary actuators; Ø spacer plate and snap ring: max. 110 mm; hole pattern on receptacle surface: 30 x 130 mm; connection shaft (shaft extension) height: 50 mm/Ø: max. 75 mm

#### P1-RI-DSU35



#### 6901086

Positioning element for angle sensors RI-DSU35