DSG-01 Series Solenoid Valves

■1/8 Solenoid Operated Directional Valves, DSG-01 Series

These are Solenoid Operated Directional Valves of high pressure, high flow and low pressure drop, the features of which can be materialized by employing a powerful wet type solenoid and the rational flow channel design.

● High Pressure & High Flow Rate

In comparison to our existing lines, both the pressure and flow of these valves are much increased.


Max. Operating Pressure: approx. 10 % increased [31.5 MPa]{357kgf/cm²} Max. Flow Rate: approx. 60 % increased [63 L/min]


Low Pressure Drop

The pressure drop of these valves is reduced by 10 % from 1.0 to 0.9MPa(10.2 to 9.2kgf/cm²), in comparison to our existing lines*; the valves effectively reduce the energy consumption of the unit. {* At Flow Rate : 60L/min, Spool Type:3C2(PA)}

Stable Operation

Due to the powerful magnetic and spring force of the solenoids, thesevalves exhibit a high tolerance to contaminants and especially stable operation.



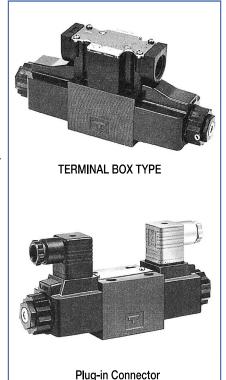

Ratings

Valve Type	Model Numbers	Max. ★ Flow L/min	Max. Operating Pressure MPa{kgf/cm²}	Max. T-Line Back Pressure MPa{kgf/cm²}	Max. Change over FrequencyCycle/min {min -1}	• • •	Mass kg /pe DC
Standard Type	DSG-01-3C **- **- **- **- **- **- **- **- **- **	100	35{357}	16{163}	240	1.9	2.2
	DSG-01-2B**-**-80		22 (207)			1.45	1.6

[★] The maximum flow means the limited without inducing any abnormality to the operation(changeover) of the valve.

The maximum flow differs according to the spool type and operating conditions.

Refer to the List of Spool Functions on pages E-12 to E-14 for details.

■Sub-plate

Sub-plate Model Numbers	Thread Size (Rc, PT)	Approx. Mass kg
DSGM-01-30	1/8	
DSGM-01X-30	1/4	0.8
DSGM-01Y-30	3/8	

■Mounting Bolt

Soc. Hd. Cap Screw (4 pcs.)	Tightening Torque
M5 × 45L	5~7Nm {0.5~0.7kgf·m} (Applicable to working pressure more than 25 MPa :6~7Nm {0.6~0.7kgf·m}

[•] Please order the sub-plate using above the model number when you see it.

The mounting surface should be used roughly 6-S after grind when you made it yourself.

■Solenoid Ratings

			_	Volta	ige V)	Current & Power at Rated Voltage			
Valve Type	Electric source	Coil Type ^{★3}	Frequency (HZ)	Source Rating	Serviceable Range	Inrush*² (A)	Holding (A)	Power (W)	
	AC		50	100	80~100	2.38	0.46	_	
		A100	60	110	100~120	2.33	0.39		
Standard Type			50	200	160~200	1.19	0.23		
Standard Type		A200	60	220	200~240	1.17	0.19		
	DC (K Series)	D12		12	10.8~13.2		2.2	26	
	DC (K Selies)	D24		24	21.6~26.4		1.1	26	

- ★1. Inrush current in the above table show rms valves at maximum stroke.
- ★2. There are more coil types other than the above. For details, please make inquiries.

The coil type numbers in the shaded column are handled as opotinal extras. In case these coils are required to be chosen, please confirm the time ofdelivery with us before ordering.

■Options

Push Button with Lock Nut


Can be used for manual changeover of spool. The push buttoncan be locked in the pressed condition.


Plug-in Connector (N)

Electrical wires are of the plug-in type which allows mountingand removal of the valve without removing connections.

Plug-in Connector with Solenoid Indicator Light (N1)

These are the indicator light incorporated plug-in connector type solenoids. Energisation or de-energisation of the solenoidcan be easily identified with the incorporated indicator light.





CSA / CE certified Products

CSA / CE certified Products are available. For details, please contact us.

■Model Number Designation

	DSG	-01	- 2	В	2	Α	-D24	-C	-N	-80	-L
Valve Type	Series Numb er	Valve Size	Number of Valve Positions	Spring	Spool Type	Special Two Position Valve(Omit if not required)	Coil Type	Manual Overrid e	Electrica 1 Conduit Connecti on	Numbe	Models with Reverse Mtg. of Solenoid
			3	C: Spring Centred	2,3 4,40 60,9 111,12	—	AC A100 A200	None: Manual Override Pin			
None: Standard Type	ional Valve	01		D: No-Spring Detented	2		D24 Push Button	C Push Button and Lock	Plug-in Connect or Type (Option)	80	
	Solenoid Operated Directional Valve			B: Spring Offset	2 3 8	A: ★1 B: ★1		Nut (Option)	Plug-in Connector Type with Indicator Light (Option)		L

- ★1. In case of the special two position valve, please refer to page E-15 for details.
- ★2. Special seals (Viton seals) are required when phosphate ester type fluids are used. (Put "F-" before model number of valve when ordering.)


In the table above, the symbols or numbers highlighted with shade represent the optional extras. The valves with model number having such optional extras are handles as options, therefore, please confirm the time of delivery with us before ordering.

■List of Standard Models and The Maximum Flow

●Models with AC Solenoids: DSG-01-※※※-A※

										Max.	Flow 1	L/min						
	ant			7	P A-	-	-B	_		P-	-	-A			P-	-	-B	
	geme			№ B—►A			(Port "B" Blocked)			(Port "A" Blocked)								
No. of Valve Positions	Spool-Spring Arrangement	Model Numbers	Graphic Symbols	A B					J A TB				A _T B ·····					
	lood					ing Pre					ing Pre					ing Pre		
	S			10	16	a{kgf/c 25	m ² }	35	10	16	a {kgf/c 25	31.5	35	10	16	1{kgf/c1 25	m ² }	35
				{102}			{321}	{357}	{102}	{163}	{255}	{321}	{357}	{102}	{163}	{255}	{321}	{357}
		DSG-01-3C2		100	100	100	100	100		100(41) 53(31)		60(17) 19(10)			100(41) 53(31)		60(17) 19(10)	38(15) 13(9)
		DSG-01-3C3			100(80) 90(63)			100(77) 90(63)	70(46) 45(30)				70(46) 45(30)		70(46) 45(30)		70(46) 45(30)	70(46) 45(30)
		DSG-01-3C4		90	90	90	90(22)	35(18) 30(11)	100(38)	76(28)	67(15)	57(10)	\ /	100(38)	76(28) 38(20)	67(15)	57(10) 16(7)	35(7) 12(5)
Three Positions Centred	ntred	DSG-01-3C40		85	85	85	80(40)	80(22)	85(40)	85(35)	85(24)	60(16)	55(12)	85(40)	85(35)	85(24)	60(16)	55(12)
Three	g Cei	<u> </u>	PT	80 40(19)	80 40(19)			25(10) 40(18)	70(26) 52(30)	50(24)			18(10) 47(30)		50(24) 52(30)		22(13) 47(30)	18(10) 47(30)
Positions	Sprin	DSG-01-3C60			37(39)	36(18)		33(17)	37(28)		36(28)		35(28)		37(28)		35(28)	35(28)
		DSG-01-3C9		100	100	100	100	100	20	15	10	10	8	20	15	10	10	8
		DSG-01-3C10		100	100		100(33)			100(37)			62(13)		100(37)			62(13)
		DGG 01 2G12	P T		100(70)	100(63)		40(19) 100(27)		55(25) 100(37)		20(11) 78(16)	15(10) 62(13)		55(25) 100(37)		20(11) 78(16)	15(10) 62(13)
		DSG-01-3C12		100	100(70)				100(37)				15(10)		55(25)		20(11)	15(10)
	No-Spring Detented	DSG-01-2D2		80	80	80	80	80	45	45	45(21)	45(16)	38(13)	50	50(45)	50(42)	45(40)	45(40)
Two	No-Sprin		PT								38(18)	28(13)	22(12)		, í	50(42)	, ,	45(40)
Positions	set	DSG-01-2B2		85	85	85	85	85	20	16	16	15	13		80(50)			44(32) 40(28)
	Spring Offset	DSG-01-2B3		70	70	70	70	70	50	50	50	50	50	80(70)	80(70) 70(48)	80(70)	80(70) 70(48)	80(70) 70(48)
	Sprin	DSG-01-2B8	MIII.	_	_	_	_	_	26	13	13	11	10	80(50)	70(40)		45(10) 10(5)	30(10) 7(5)
			PT											33(20)	43(13)	13(8)	10(3)	1(3)

Notes: 1. The relation between the maximum flow in the table above and the frequency/voltage (within the serviceable voltage) is as shown below.

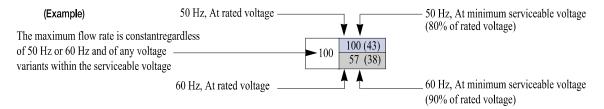

2. For the maximum flow rate in P \rightarrow T of the valves with a \bigstar mark, please see page E-14


The valve models with a ★mark are handled as options. If you choose such valves, check the time of delivery beforehand.

List of Standard Models and The Maximum Flow

●Models with DC or R Type Solenoids: DSG-01-※※※-D※

										Max.	Flow I	_/min						
	ngement			* 1	A- P B-	>	B A	>			► B" Blo				P- (Port "	→ A" Blo	_	
No. of Valve Positions	Spool-Spring Arrangement	Model Numbers	· · · ·	A B					A TB				AT B					
	Spool-			Working Pressure Mpa{kgf/cm²}					Mpa	ing Pre ı{kgf/c	m^2			Mpa	ing Pre 1{kgf/c	m^2		
				$10 \\ \{102\}$	16 {163}	25 {255}	31.5 {321}	35 {357}	10 {102}	16 {163}	25 {255}	31.5 {321}	35 {357}	10 {102}	16 {163}	25 {255}	31.5 {321}	35 {357}
		DSG-01-3C2		100	100	100	100	100	100 55	45 35	28 23	25 19	22 17	100 55	45 35	28 23	25 19	22 17
		DSG-01-3C3		100	100 80	100	100 80	100	78 70	78 70	78 70	78 70	75 70	78 70	78 70	78 70	78 70	75 70
		DSG-01-3C4		90	90	90 42	50 26	38	100 62	58 48	38	31 25	29 23	100	58 48	38	31 25	29 23
Three	entred	DSG-01-3C40		85	85	65	40	33	85 65	52	30	26 21	24	85 65	52	30 25	26 21	24 19
Positions	Spring Centred	DSG-01-3C60		32 28	32 28	32	32	32	52 42	44 38	44	44	44 38	52 42	44	44	44	44 38
	S	DSG-01-3C9		100	100	100	100	100	20	15	10	10	8	20	15	10	10	8
		DSG-01-3C10	A B	85	85	85 35	80	40 20	100 74	56	36 28	28 20	24 19	100 74	56 43	36 28	28	24 19
		DSG-01-3C12	P T	85	85	85 35	80	40	100	56	36	28	24	100	56	36 28	28	24
	No-Spring Detented	DSG-01-2D2	p' T	75	75	75	75	75	45	45	40	30	27	50	50	50	45	45
Two	No-Spring	D3G-01-2D2		70	70	70	70	70	73	73	30	25	22	50	45	42	40	40
Positions	fset	DSG-01-2B2	ABIT INDE	80	80	80	80	80	20	16	16	15	13	46 33	31 23	24 19	22 19	22 18
	Spring Offset	DSG-01-2B3	MªHXE™	70	70	70	70	70	50	50	50	50	50	75 65	75 6	75 5	75 65	75 65
	Spi	DSG-01-2B8	A B I I I I I I I I I I I I I I I I I I	_	_	_	_	_	26	17	13	11	10	53 35	35 30	23 17	19 13	7 12

Notes: 1. The relation between the maximum flow in the table above and the frequency/voltage (within the serviceable voltage) is as shown below.

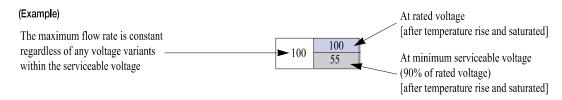


2. For the maximum flow rate in P \rightarrow T of the valves with a \star mark, please see page E-14

The valve models with a ★mark are handled as options. If you choose such valves, check the time of delivery beforehand.

■Maximum Flow of Centre By-Pass (P→T)

★ In valve type 3C60, in case where the actuator is put on in between the cylinder ports A and B as illustrated below andwhere the actuator moves and suspended at its stroke end and where the valve is then shifted to the neutral position in the suspended state of the actuator, the maximum flow rates available are those as shown as the table below regardlessof any voltage in the range of serviceable valtage.




		Max. Flow L/min								
Model Number	Graphic Symbol	10 MPa {102kgf/cm²}	16MPa {163kgf/cm²}	25MPa {255kgf/cm²}	31.5MPa {357kgf/cm ² }	35MPa {357kgf/cm ² }				
DSG-01-3C60-A **/D **	**************************************	43	40	30	25	20				

■Typical Changeover

Changeover time varies according to oil viscosity, spool type and hydraulic circuit.

Standard Type (Without Shockless Function)



[Test Conditions]

Pressure: 16 MPa{163kgf/cm²}

Flow Rate: 31.5 L/min Viscosity: 35mm²/s{cSt}

Voltage: 100 %V(After coil temprature rises and saturated)

[Result of Measurement]

Туре	Model Numbers	Time ms				
		Tı	T ₂			
Standard	DSG-01-3C2-A*	15	23			
Туре	DSG-01-3C2-D*	48	19			

■Reverse Mounting of Solenoid.

In spring offset type, it is a standard configuration that the solenoid is mounted onto the valve in the SOL b position(side). However, in this particular spool-spring arrangement, the mounting of the solenoid onto the valve in the reverseposition -SOL a side- is also available. The graphic symbol for this reverse mounting is as shown below. As for the valve type 2B * A and 2B * B, please refer to the explanation under the heading of "Valves Using Neutral Position and Side Position" given below.




Standard Mtg. of Solenoid

Reverse Mtg. of Solenoid

■ Valves Using Neutral Position and Side Position. (Special Two position Valve)

Besides the use of the standard 2-position valves aforementioned in the "List of Standard Models and Maximum Flow", the 3-position valves also can be used as the 2-position valves using the two of their three positions. In this case, thereare two kinds of the valve available. One is the valve using the neutral position and SOL a position (2B * A) and another is the valve using the neutral position and SOL b position (2B * B).

(Example) In case of Spool Type "2"

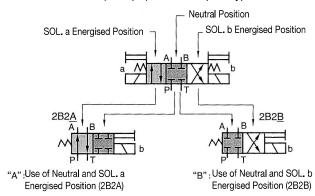


	Graphic Symbols						
Model Numbers	Standard Mtg. Type	Reverse Mtg. Type					
DSG-01-2B * <u>A</u>	A B B	a A B					
DSG-01-2B3A	(EIIH)	HIX					

	Graphic	Symbols
Model Numbers	Standard Mtg. Type	Reverse Mtg. Type
DSG-01-2B <u>*</u> B	A T B b	مُلِينًا اللهِ
DSG-01-2B2B		
DSG-01-2B3B	HIX	
DSG-01-2B4B	CXIE	
DSG-01-2B60B		
DSG-01-2B10B		
DSG-01-2B12B		

■Pressure Drop

Pressure drop curves based on viscosity of 35 mm²/s and specific gravity of 0.850.

Standard Type: DSG-01

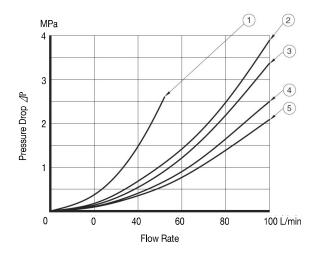

Model Numbers	Pres	sure Di	rop Cui	ve Nur	nber
	P→A	В→Т	Р→В	A→T	P→T
DSG-01-3C2	(5)	(5)	(5)	(5)	-
DSG-01-3C3	6	6	6	6	4
DSG-01-3C4	(5)	6	(5)	6	-
DSG-01-3C40	(5)	(5)	(5)	(5)	-
DSG-01-3C60	1	1	1	1	4
DSG-01-3C9	6	(5)	6	(5)	-
DSG-01-3C10	(5)	6	(5)	(5)	-
DSG-01-3C12	(5)	(5)	(5)	6	-
DSG-01-2D2	(5)	2	(5)	2	-
DSG-01-2B2	2	2	(5)	(5)	-
DSG-01-2B3	3	3	(5)	6	-
DSG-01-2B8	(5)	-	(5)	-	-

• For any other viscosity, multiply the factors in the table below.

Viscosity	mm²/s{cSt}	15	20	30	40	50	60	70	80	90	100
Viscosity	SSU	77	98	141	186	232	278	324	371	417	464
F	Factor	0.81	0.87	0.96	1.03	1.09	1.14	1.19	1.23	1.27	1.30

ullet For any other specific gravity (G'), the pressure drop (ΔP) may be obtained from the formula below.


$$P' = \Delta P (G'/0.850)$$

Mounting surface: ISO 4401-AB-03-4-A


TERMINAL BOX TYPE (Standard)

■ Models with AC Solenoids: DSG-01-※※※-A※

Double Solenoid: Spring Centred & No-Spring Detented

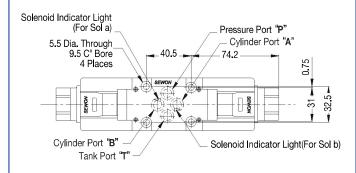



Single Solenoid: Spring Offset



- For other dimensions, refer to "spring Centred and No-Spring Detented" models.
- Solenoid being mounted in the reverse position. SOL a side is also available.

Space Needed to Remove Solenoid-Each End

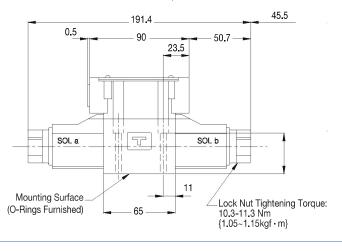




■Models with DC Solenoids: DSG-01-※※※-D※

- Spring Centred
- No-Spring Detented
- Spring Offset

Space Needed to Remove Solenoid-Each End

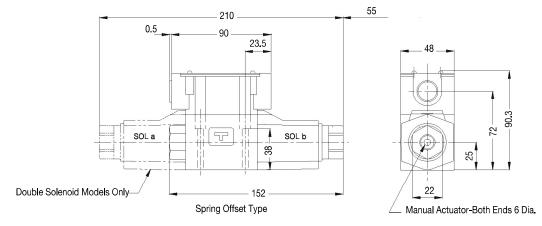


• For other dimensions, refer to models with AC solenoids.

OPTION

■ OPTIONPLUG-IN CONNECTOR. PLUG-IN CONNECTOR WITH INDICATOR LIGHT

Models with AC Solenoids : DSG-01-※※※-A※-N/N1

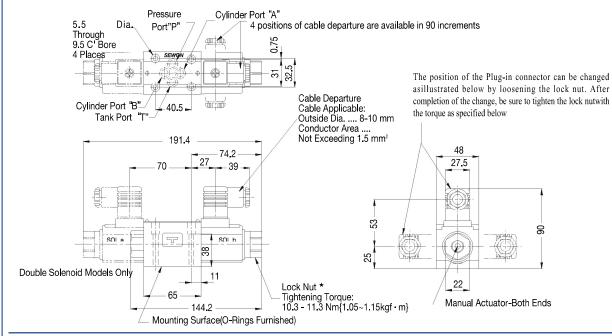

Models with DC Solenoids : DSG-01-※※※-D※-N/N1


The position of the Plug-in connector can be changed as illustrated below by loosening the lock nut.

After completion of the change, be sure to tighten the lock nut with the torque as specified below.

_Lock Nut * Tightening Torque:10.3 - 11.3 Nm{1.05~1.15kgf - m}

■Sub-plate: DSGM-01, 01X, 01Y

152

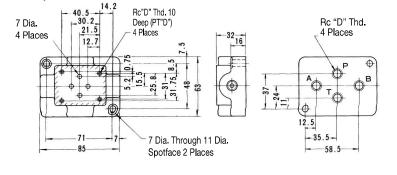


Sub-plateModel Numbers	D
DSGM-01-30	1/8
DSGM-01X-30	1/4
DSGM-01Y-30	3/8

CAUTION

When making replacement of seals or solenoid assemblies, please do it carefully after reading through the relevant instructions in the Operator's Manual.

■List of Seals & Solenoid Ass'y: Models with AC Solenoids

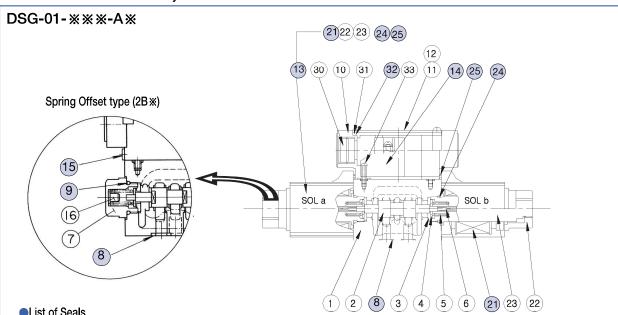

List of Seals

T.	Name of Parts	D (3) 1	Qty.			2	
Item		Part Numbers	3C **	2D**	2B **	Remarks	
8	O-Ring	JIS B 2401-1B-P9	4	4	4		
9	O-Ring	JIS B 2401-1B-P18	_	_	1		
15	Packing	1790S-VK411689-3	_	_	2		
24	O-Ring	JIS B 2401-1B-P18	2	2	1	Included in Solenoid Ass'y (Item(3))	
25	O-Ring	JIS B 2401-1A-P4	4	4	2	Included in Solehold Ass y (Item(3)	
32	Packing	1790S-VK411686-9	1	1	1		

List of Solenoid Ass'y, Coil & Receptacle

Valve Model Numbers	① Solenoid Ass'y No. ^{★1}	② Coil No.	14 Receptacle Part No.
DSG-01- ** ** **-A100	SA1-100-50	1790S-VK414403-6	R1-10
DSG-01- ** ** -A200	SA1-200-50	1790S-VK414405-1	K1-10

★1. When ordering the solenoid assembly with push button and lock, be sure to give the number in the following manner:

Chage of supply voltage

In case AC->DC, replace the coil ②, solenoid Ass'y (13(include (23)) and receptacle (14)

Chage of supply voltage

The supply voltage can be changed byreplacing the coil 20only.

SA1-120-C-N-50

Electrical Conduit Connection

N:Plug-in Connector(Omit for terminal box type)

Manual Override


C:Push Button & Lock(Option-Omit for manual override pin)

Coil Type (Refer to table below)

! CAUTION

When making replacement of seals or solenoid assemblies, please do it carefully after reading through the relevant instructions in the Operator's Manual.

■List of Seals & Solenoid Ass'y: Models with DC Type Solenoids

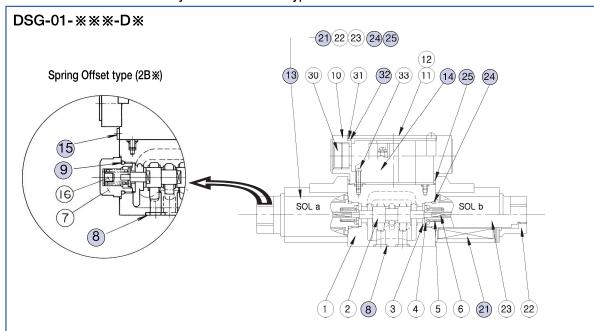

Chage of supply voltageIn

In case DC↔AC, replace the coil⁽²⁾, solenoid Assy ⁽³⁾ (in clude ⁽²⁾) and receptacle ⁽⁴⁾.

●솔레노이드 Ass'y, 코일 일람

Valve Model Numbers	① Solenoid Ass'y No.★¹	② Coil No. *2	(4) Receptacle Part No.
DSG-01- * * * *-D12	SD1-12-50	1790S-VK414392-1	KR1-A-11
DSG-01- * * * *-D24	SD1-24-50	1790S-VK414393-9	

Seal

Seals are the same as the those of the AC solenoid type.Refer to the page E-19.

★1. When ordering the solenoid assembly with push button and lock, be sure to give the number in the following manner:

SD1-12-C-N-50

Electrical Conduit Connection

N: Plug-in Connector(Omit for terminal box type) Manual Override


C:Push Button & Lock(Option-Omit for manual override pin)

- Coil Type (Refer to table below)

-Supply Voltage D: DC


■Wiring Method


Details of Receptacle

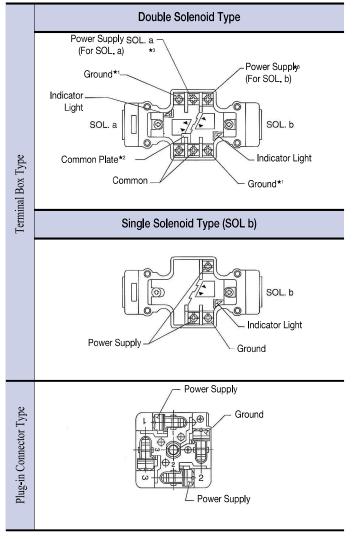

- ★1. There are two grounding terminals. You can use either one.
- ★2. If you do not need the common plate, remove it.
- ★3. With DC solenoids, polarity is no question.

Electrical Circuit

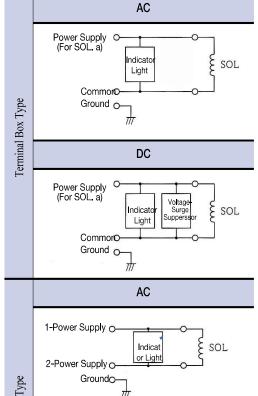





- Do not perform wiring while the power is on. Doing so may result in electric shock, burns or death.
- Make the wiring properly. Improper wiring will cause anirregular movement of the machine, resulting in a graveaccident.