


# WLAW360X180L11Q Work Light – Area Light



### Technical data


Туре	WLAW360X180L11Q
ID	3018246
Signal and display data	
Purpose	LED work light
Function	Area light
Light type	White
Color temperature	5300+7000 K
Luminous flux lumen	2200 lm
Aperture angle degree	11 °
Beam angle	11°
LED service life (L70)	50000 h
Dimmable	no
Features of color 1	White, Permanently on, 2200 Im
Special features	Wash down
Electrical data	
Operating voltage	1230 VDC
DC rated operational current	≤ 1600 mA
Input power	38.4 W
Mechanical data	
Cascadable	No
Design	Rectangular, WLA
Dimensions	381.4 x 180.1 x 25.8 mm
Housing material	Plastic, PBT, Grey
Window material	Acrylic, clear
Electrical connection	Connector, M12 × 1, PVC
Number of cores	4

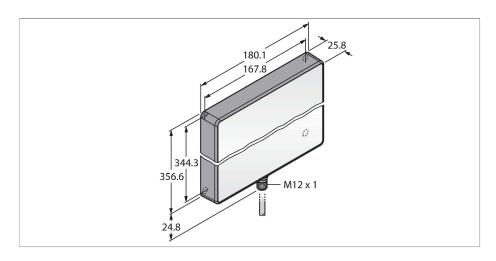

## **Features**

- Protection classes IP67/IP69K ■ Operating voltage: 12...30 VDC
- Color: Cold white
- ■Illuminance at 1 m: 8875 lx
- ■M12 x 1 connector

## Wiring diagram



# Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature lies in the range of daylight, between 5,300 and 7000 Kelvin. Depending on the model, the luminous flux ranges between 550 and 2200 lumen. The lights are available on request in the colors warm white, green, red, yellow or blue as well as with different lenses that change the opening angle. Both also affects the luminous flux and the luminous intensity.


via standard M12 × 1 connector or pigtail directly at the terminal connection of existing installations.



## Technical data

Ambient temperature	-20+50 °C
Storage temperature	-40+70 °C
Relative humidity	095 %
Protection class	IP67 IP69
Tests/approvals	
Approvals	CE, cULus

### Accessories



SMBBSRA

0 7
0 6.5
0 6.5
0 6.5
167.8
194.5

Mounting bracket, 316 stainless steel, for versatile mounting of WLA work lights, bracket can be aligned

3017708

Magnetic holder for direct mounting of WLA work lights on metallic surfaces, 4 magnets per light required, SMBWLAMAGR as optional scratch protection

### Accessories

