


# LT3PILV W/30 Photoelectric Sensor – Retroreflective Sensor Laser Running Time Meter



### Technical data


Туре	LT3PILV W/30		
ID	3067281		
Optical data			
Function	Retroreflective Sensor		
Operating mode	Time-of-Flight		
Reflector included in delivery	yes		
Light type	Red		
Wavelength	658 nm		
Laser class	<u>A</u> 1		
Repeatability	4.5 mm		
Range	50050000 mm		
Ambient light immunity	5000 lux		
Electrical data			
Operating voltage	1224 VDC		
Residual ripple	< 10 % U <sub>ss</sub>		
DC rated operational current	≤ 100 mA		
No-load current	≤ 108 mA		
Short-circuit protection	yes		
Reverse polarity protection	yes		
Output function	NO contact, PNP/Analog output		
Switching frequency	≤ 1000 Hz		
Readiness delay	≤ 1 s		
Readiness delay	≤ 1000 ms		
Response time typical	< 1 ms		
Mechanical data			
Design	Rectangular, LT3		

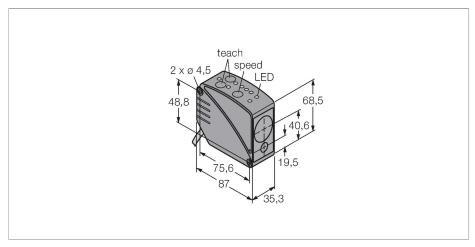

### **Features**

- Cable, 7-wire, 9 m
- ■Indication of signal intensity
- ■Protection class IP67
- ■BRT-TVHG-8X10P highly reflective foil, incl. in delivery
- Measuring range with according reflector foil: 50 m
- ■3 response times adjustable for switching output
- Operating voltage: 12...24 VDC
- Hysteresis and measuring range independently adjustable
- ■Edge of the analog output invertible

### Wiring diagram



### Functional principle

This distance sensor uses pulsed time-of-flight technology and is thus extremely powerful. The laser pulses one million times per second. The microprocessor records the time required for each pulse to travel to the object and back to the sensor. Every millisecond, one thousand pulse times are averaged and the

#### 87 x 35.3 x 68.5 mm **Dimensions** Housing material Plastic, ABS, Black Lens plastic, Acrylic Electrical connection Cable, 9 m, PVC 8 Number of cores Core cross-section 0.34 mm<sup>2</sup> Ambient temperature 0...+50 °C Relative humidity 90 % **IP67** Protection class Special features Laser Teach input Power-on indication LED, Green Switching state LED, Yellow LED Error indication

LED, red

CE, cURus


°C

15 years acc. to SN 29500 (Ed. 99) 40

corresponding value is transferred to the output.

The sensor achieves its highest accuracy after a 30-min. warm-up period.

### Resolution in Dependence on Distance



### Accessories

Excess gain indication


Tests/approvals


**MTTF** 


Approvals

Technical data


### SMBAMSLT3IP 3073442 Protective housing with safety glas panel, for LT3 series

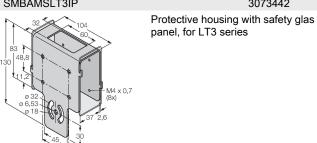

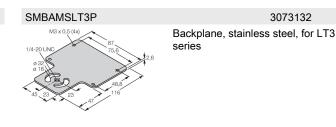



3068505 Mounting bracket, stainless steel, for LT3 series



3069236 Protective housing, stainless steel, for LT3 series



3070973

Protective housing, stainless steel, for LT3 series

## Accessories

Dimension drawing	Туре	ID	
	BRT-TVHG-8X10P	3069119	Reflective foil, self-adhesive, cuttable, highly reflective, 203 x 254 mm